



BEARING SECTION

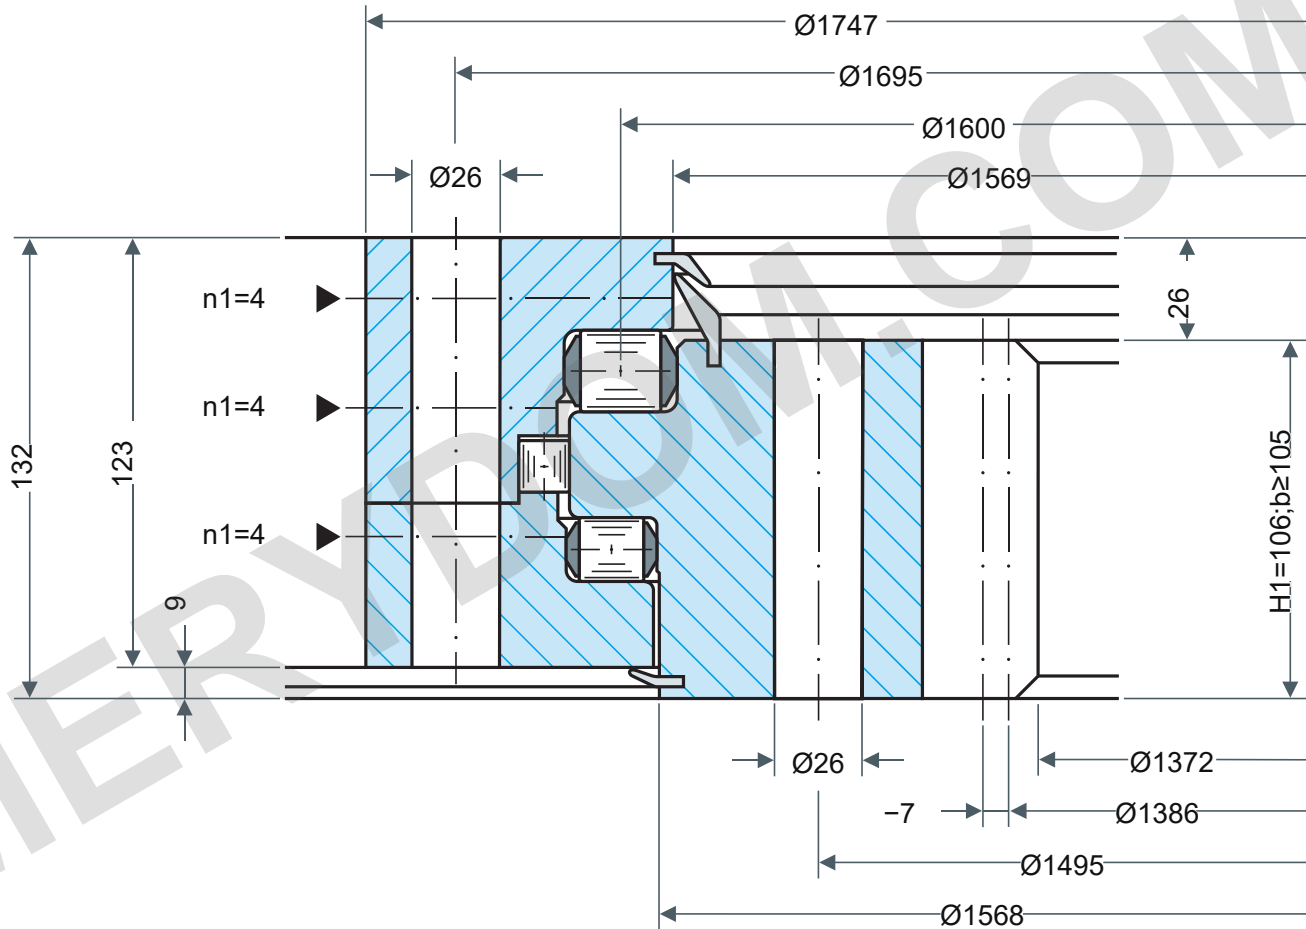


LOAD CAPACITY

Rothe Erde 192.20.1600.990.41.1502

Static boundary load curves

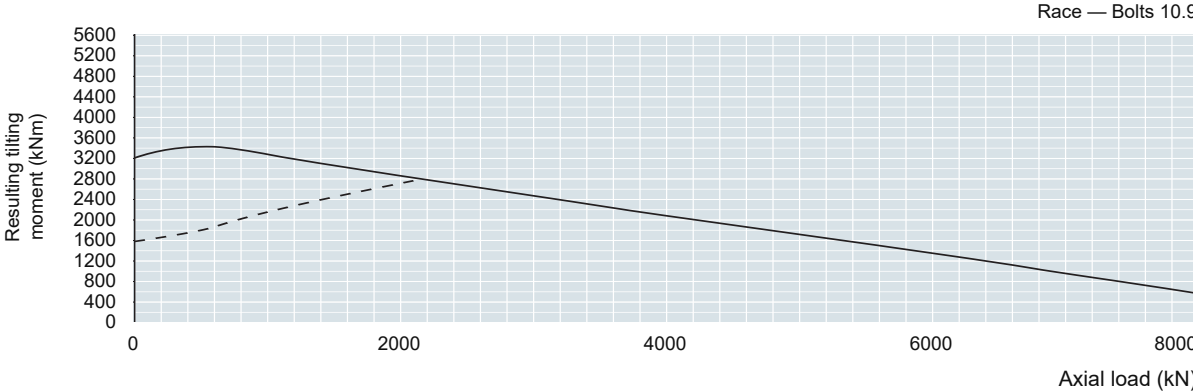

Utilization period — 30,000 revolutions

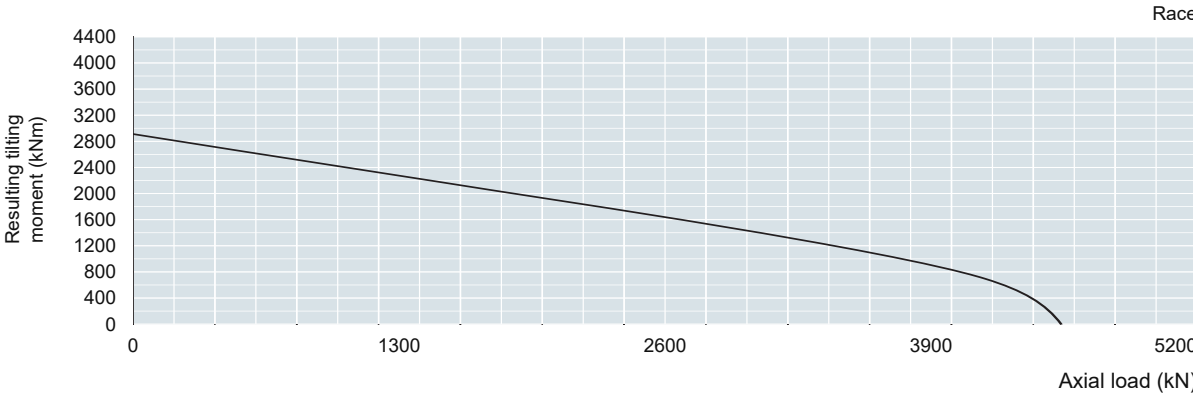

Raceway read-off loads require application factors: static fstat; utilization fL.

See source Table1, printed page61. Curve parameter:30,000 full-load rotations.

Application-specific factors are not selected here.

Drawing position = mounting position.

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.

Source: Rothe Erde EN1225; dimensions p96; load chart p96.

innerH1=106/outerH2=123;Ho26/Hu9;La1695/Li1495:40Ø26 through;boltM24;d1386/m14/z99/x-7;bmin≥105;X1/X2=134.93/269.86kN;n1=4;Ø≤2000±3.5/≤4000±5mm

Rothe Erde 192.20.1600.990.41.1502 — Product page | MERYDOM

MERYDOM

Three-row roller bearing

192.20.1600.990.41.1502

REFERENCE: Rothe Erde /19

Rev1.0 | mm | NTS | 1/1