



BEARING SECTION

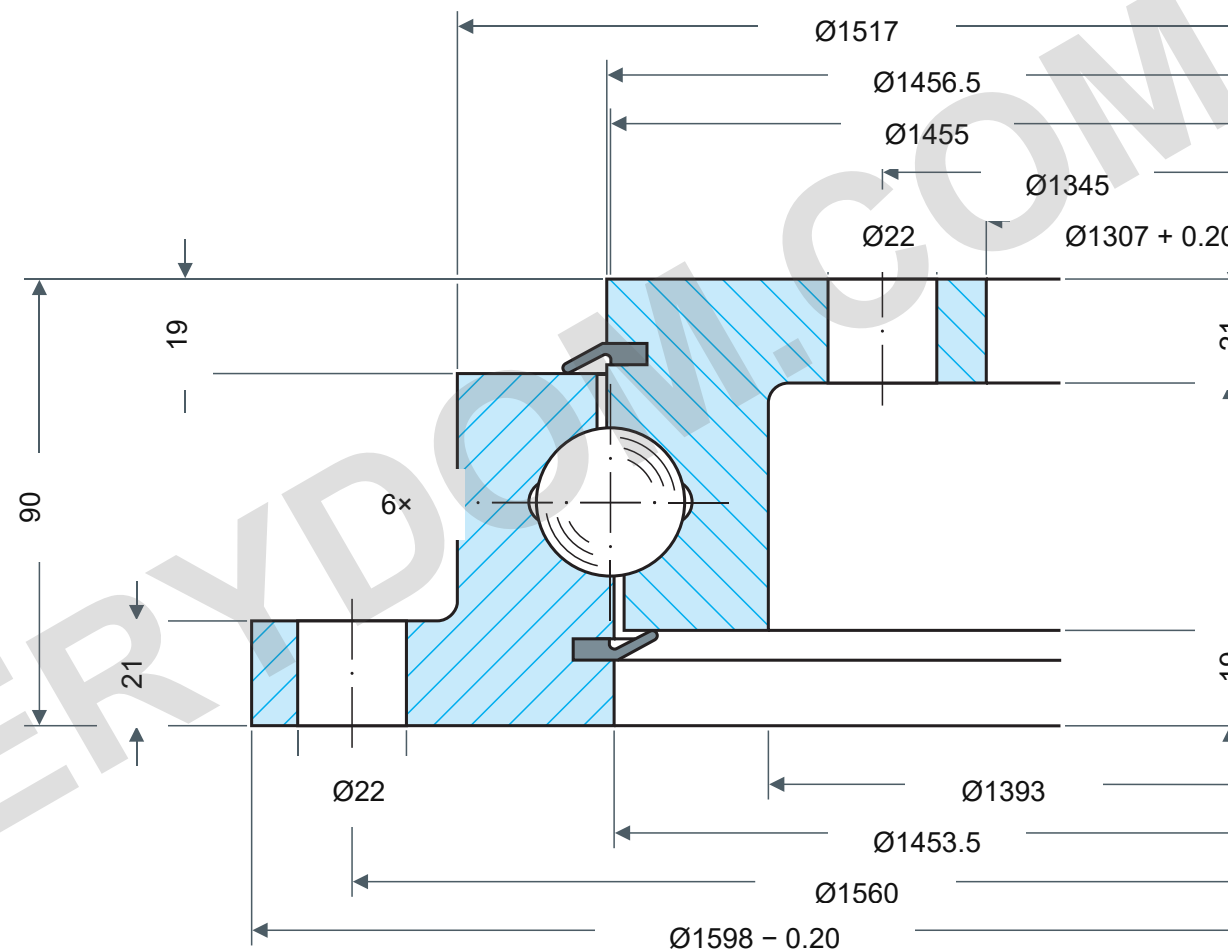


LOAD CAPACITY

Rothe Erde 280.30.1475.013

Static boundary load curves

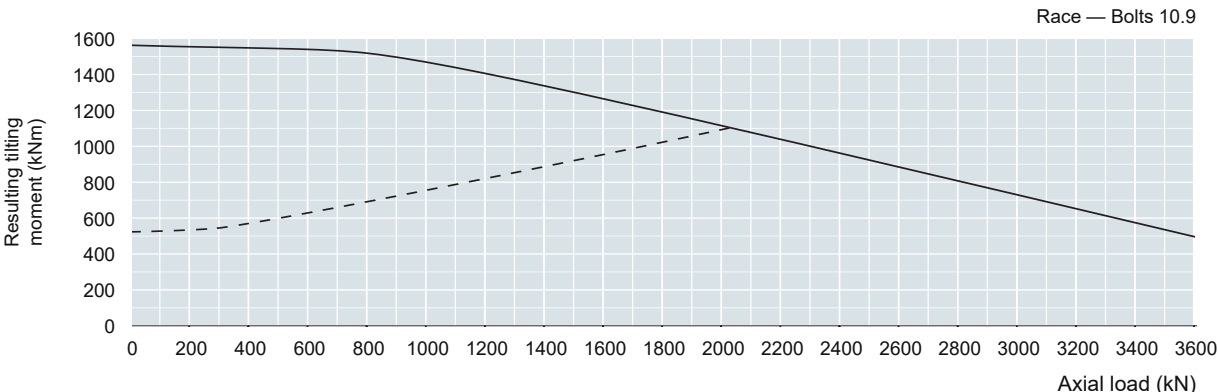

Utilization period — 30,000 revolutions

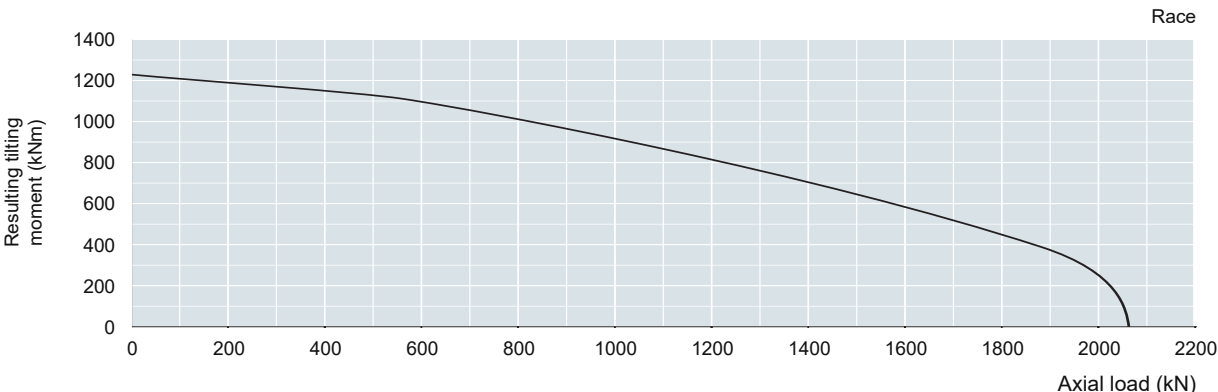

Raceway read-off loads require application factors: static fstat; utilization fL

See source Table1, printed page61. Curve parameter:30,000 full-load rotations.

Application-specific factors are not selected here

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.

Source: Rothe Erde EN1225; dimensions p56; load chart p56.

Da1598 - 0.20; Di1307 + 0.20; H90; Ho/Hu19; La1560/48xØ22; Li1345/48xØ22; flange21; Y axial + radial ≥ 0 to 0.07 mm

Rothe Erde 280.30.1475.013 — Product page | MERYDOM

MERYDOM

Single-row profile ball bearing

280.30.1475.013

REFERENCE: Rothe Erde /28

Rev1.0 | mm | NTS | 1/1