



BEARING SECTION

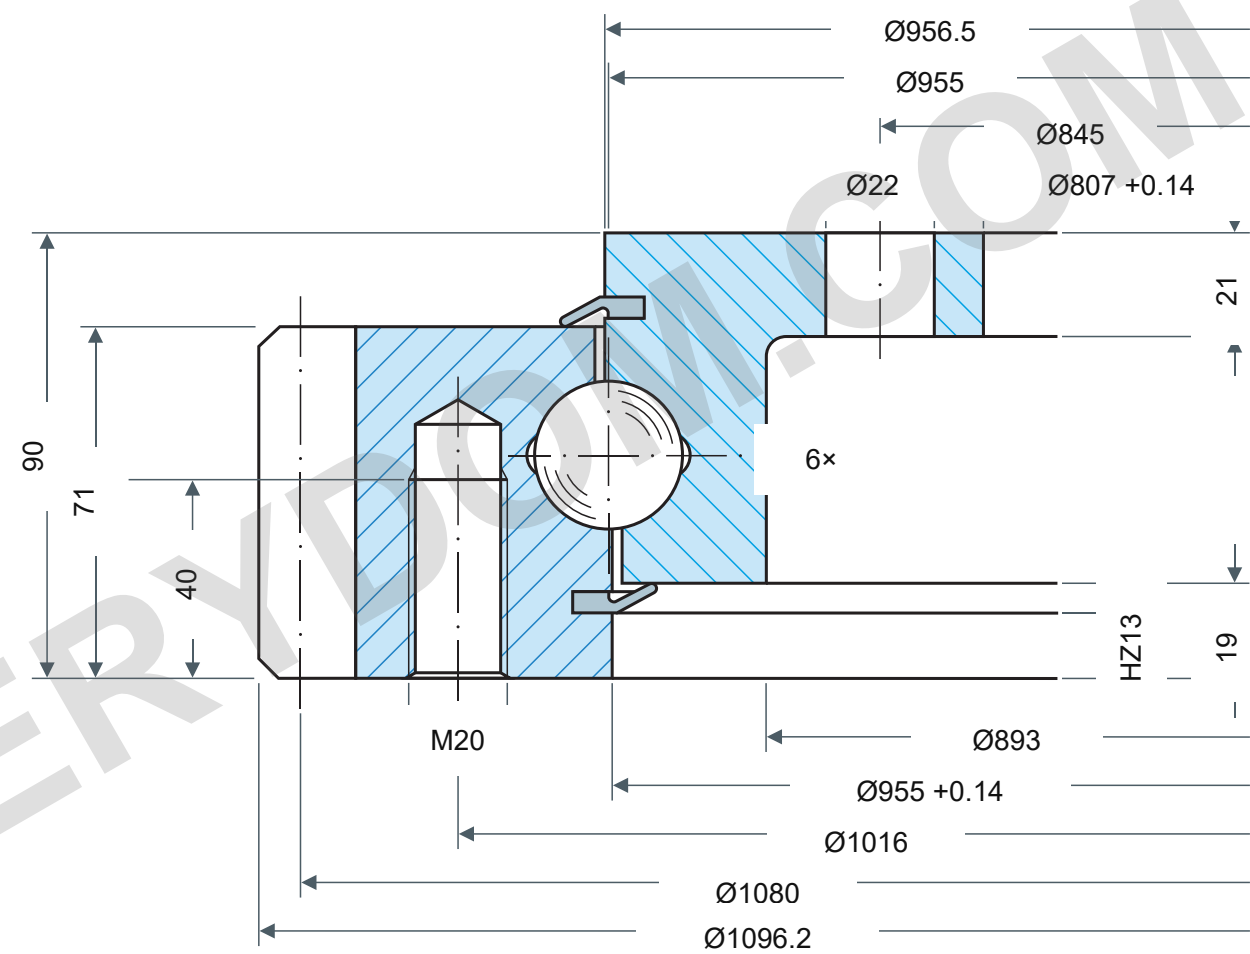


LOAD CAPACITY

Rothe Erde 281.30.0975.013

Static boundary load curves

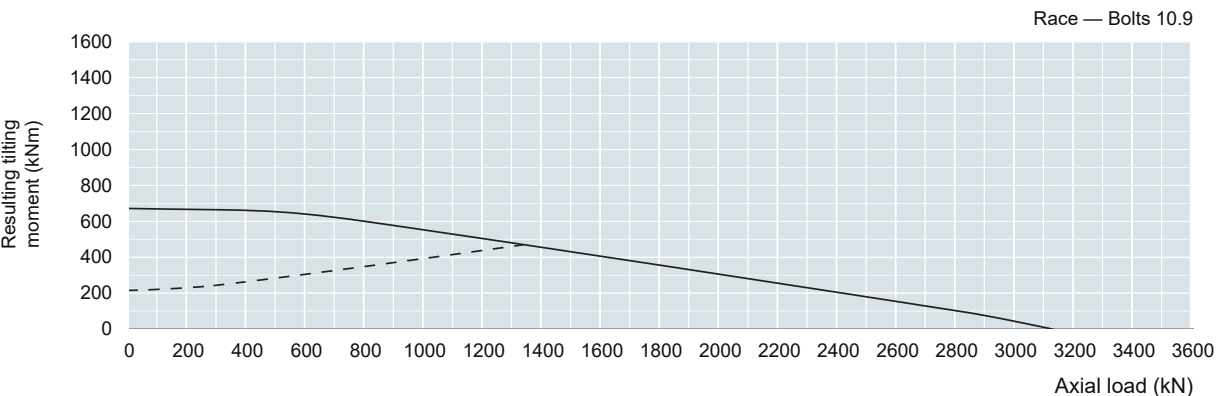

Utilization period — 30,000 revolutions

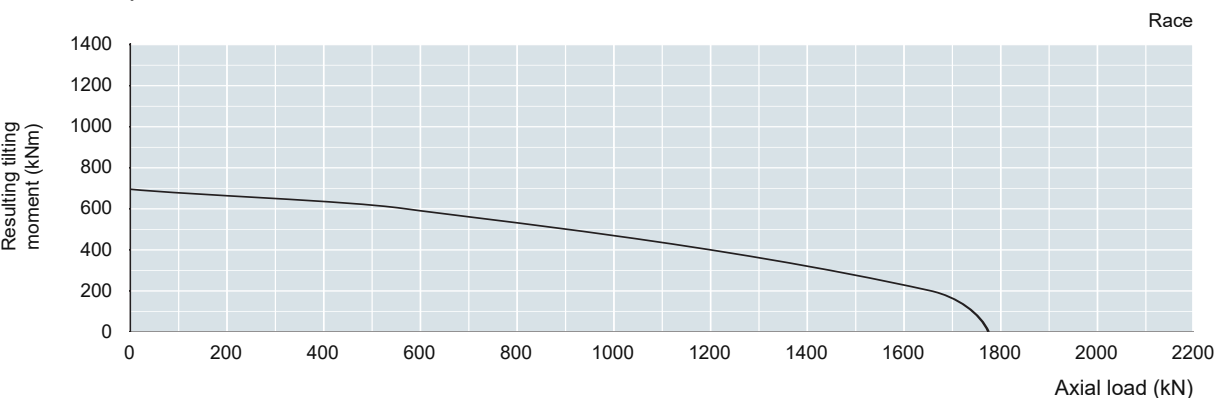

Raceway read-off loads require application factors: static f_{stat} ; utilization f_L .
See source Table1, printed page61. Curve parameter:30,000 full-load rotations.
Application-specific factors are not selected here.

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.
Source: Rothe Erde EN1225; dimensions p57; load chart p57.
Da1096.2; Di807 +0.14; U955 +0.14; HZ13/companion12; H90/Hu19; La1016/30×M20 blind40; Li845/30×Ø22; d1080/m9/z120/b71; Y axial + radial ≥0 to0.06 mm
Rothe Erde 281.30.0975.013 — Product page | MERYDOM

MERYDOM
Single-row profile ball bearing
281.30.0975.013
REFERENCE: Rothe Erde /28
Rev1.0 mm NTS 1/1