



BEARING SECTION

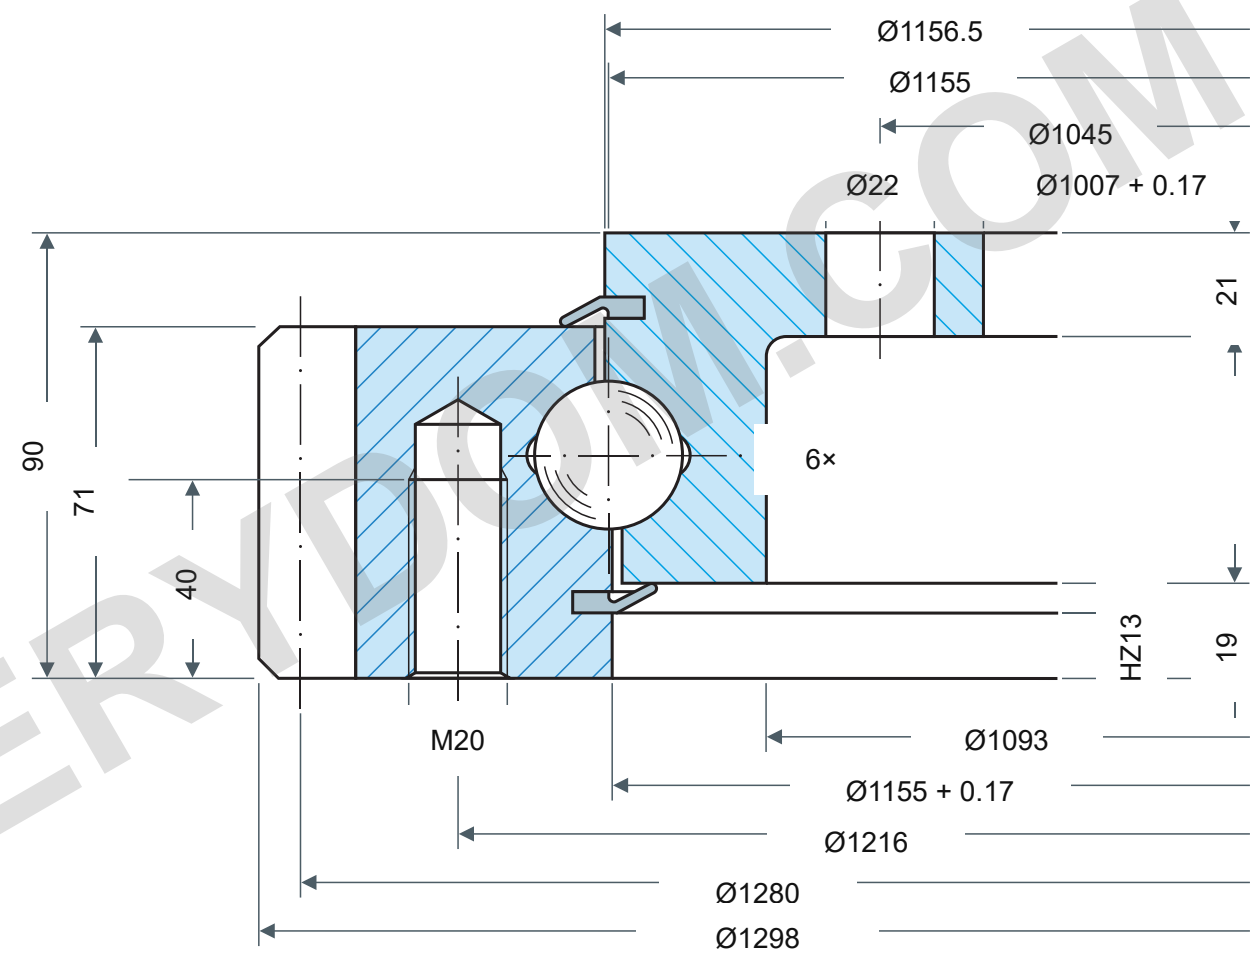


LOAD CAPACITY

Rothe Erde 281.30.1175.013

Static boundary load curves

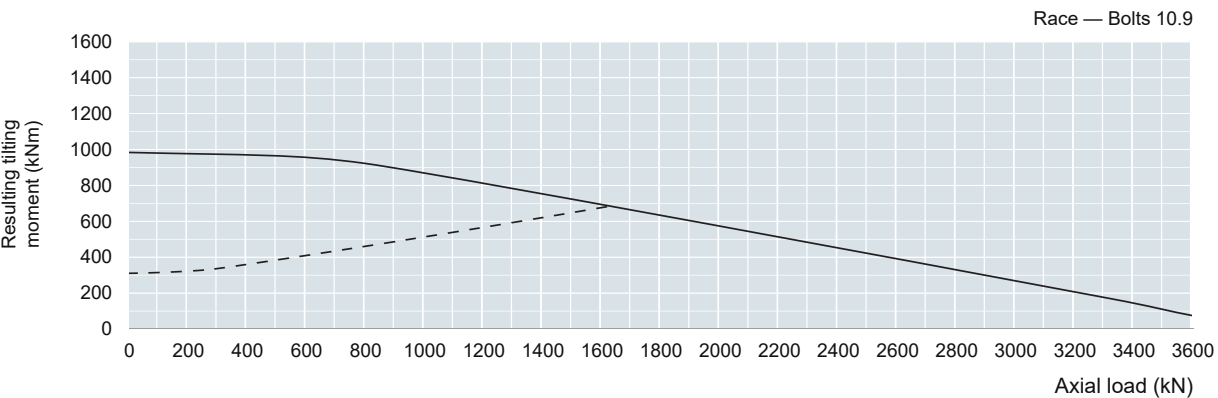

Utilization period — 30,000 revolutions

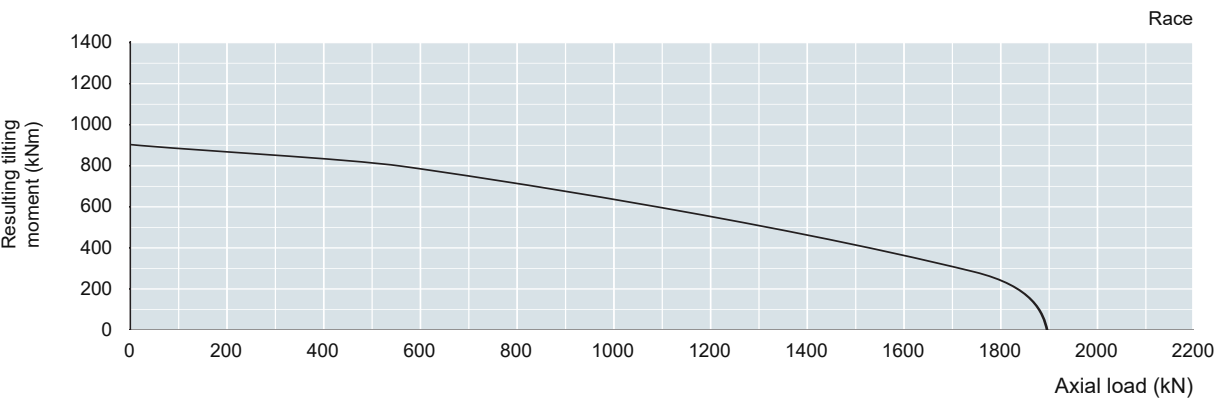

Raceway read-off loads require application factors: static f_{stat} ; utilization f_L .
See source Table1, printed page61. Curve parameter:30,000 full-load rotations.
Application-specific factors are not selected here.

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.
Source: Rothe Erde EN1225; dimensions p57; load chart p57.
Da1298; Di1007 + 0.17; U1155 + 0.17; HZ13/companion12; H90/Hu19; La1216/36xM20 blind40; Li1045/36xØ22; flange21; d1280/m10/z128/b71; Y axial + radial ≥ 0 to 0.06 mm
Rothe Erde 281.30.1175.013 — Product page | MERYDOM

MERYDOM
Single-row profile ball bearing
281.30.1175.013
REFERENCE: Rothe Erde /28
Rev1.0 mm NTS 1/1