



BEARING SECTION

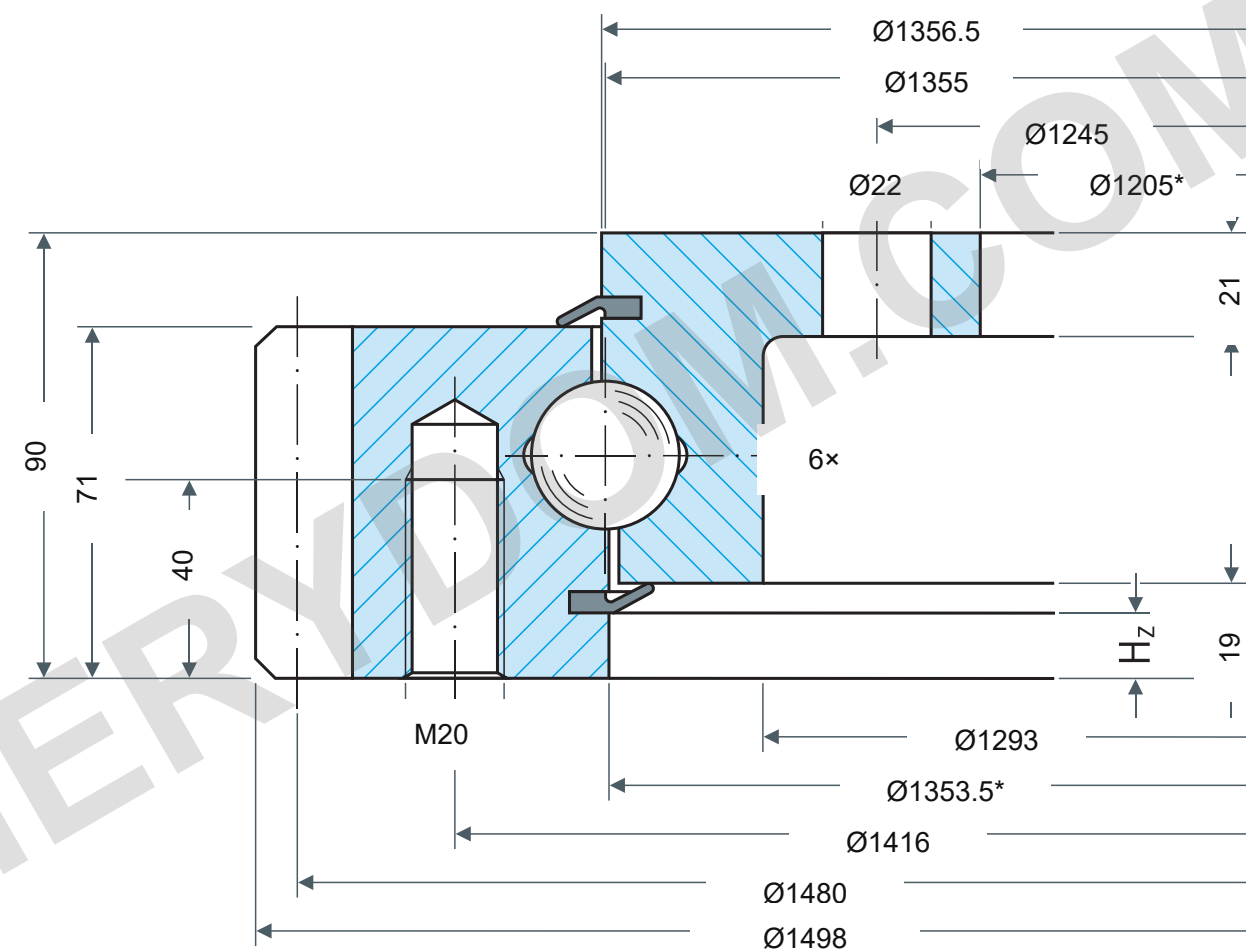


LOAD CAPACITY

Rothe Erde 281.30.1300.013

Static boundary load curves

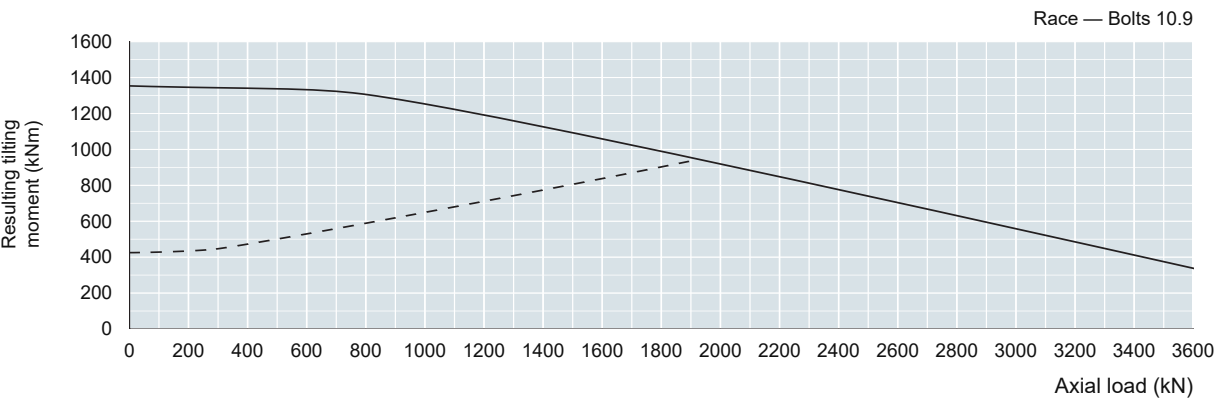

Utilization period — 30,000 revolutions

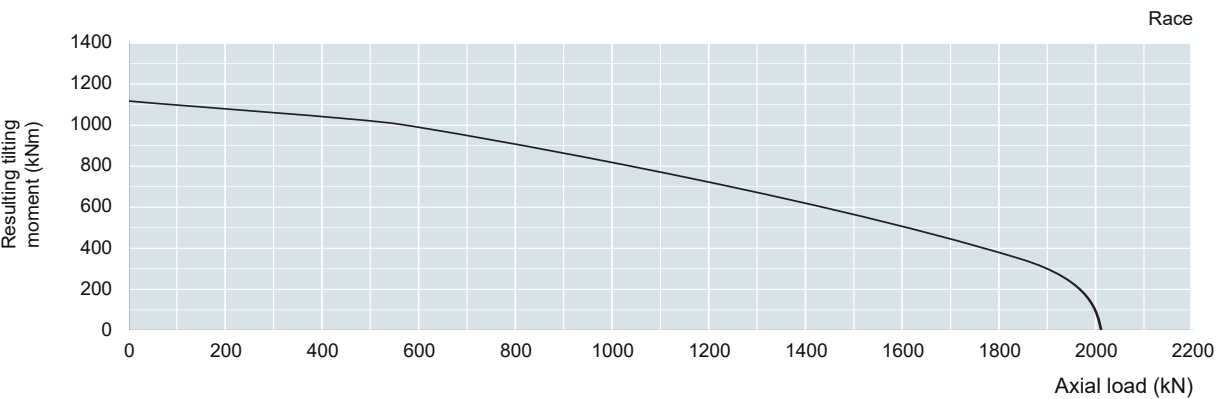

Raceway read-off loads require application factors: static f_{stat}; utilization f_L.
See source Table1, printed page61. Curve parameter:30,000 full-load rotations.
Application-specific factors are not selected here.

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.
Source: Rothe Erde EN1225; dimensions p54; load chart p54.
Da1498; Di1205; H90; Hu19; La1416/42×M20 blind40; Li1245/42×Ø22; flange21; d1480/m10/z148/b71; Y axial≤ 0.45/radial≤ 0.37 mm
Rothe Erde 281.30.1300.013 — Product page | MERYDOM

MERYDOM
Single-row profile ball bearing
281.30.1300.013
REFERENCE: Rothe Erde /28
Rev1.0 mm NTS 1/1