



BEARING SECTION

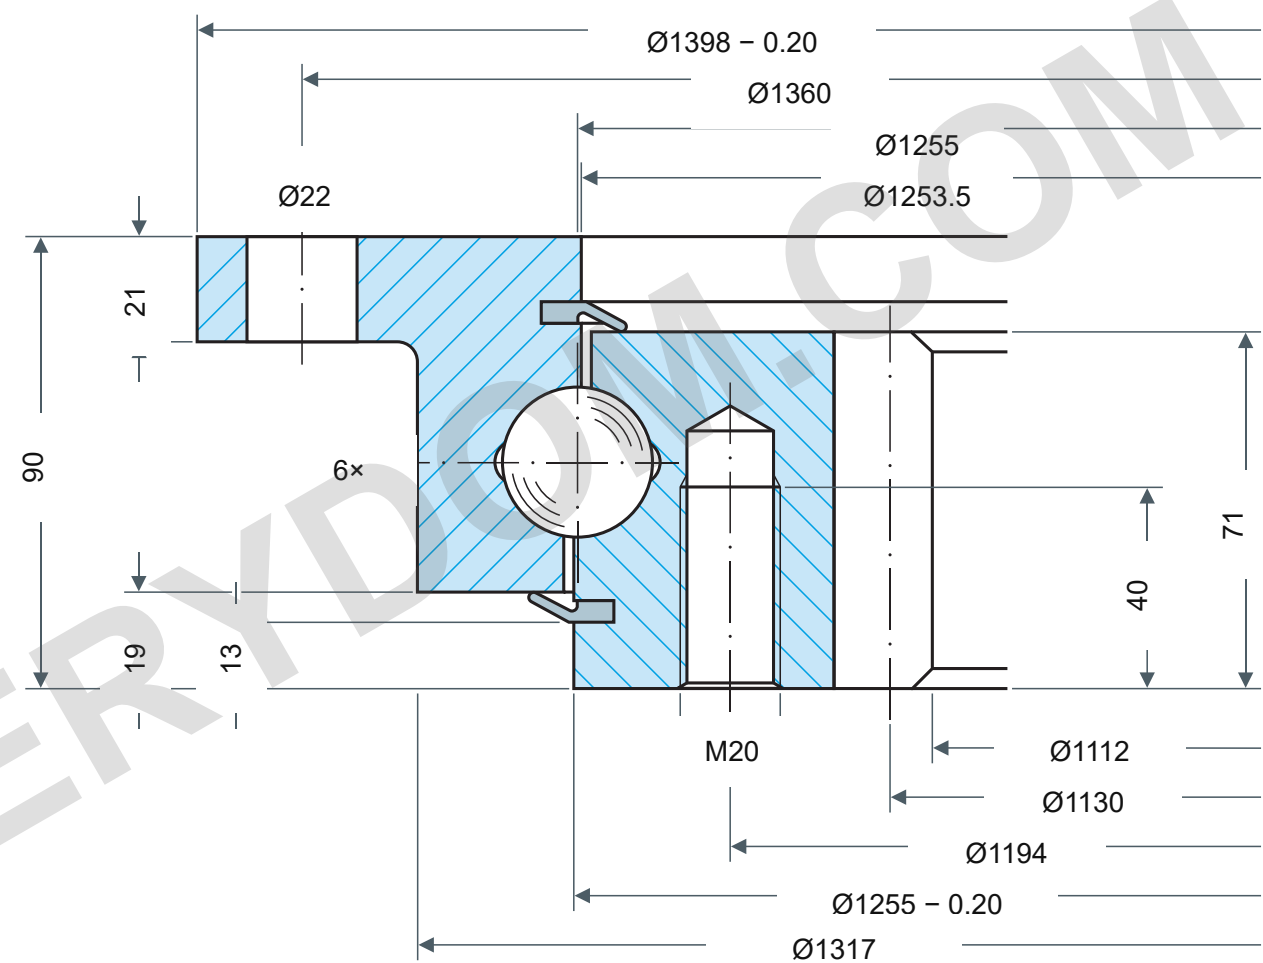


LOAD CAPACITY

Rothe Erde 282.30.1275.013

Static boundary load curves

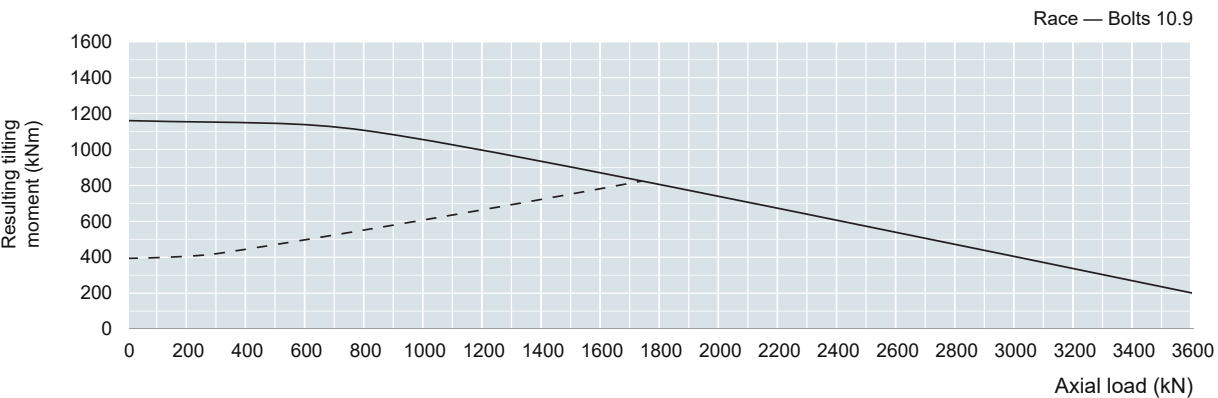

Utilization period — 30,000 revolutions

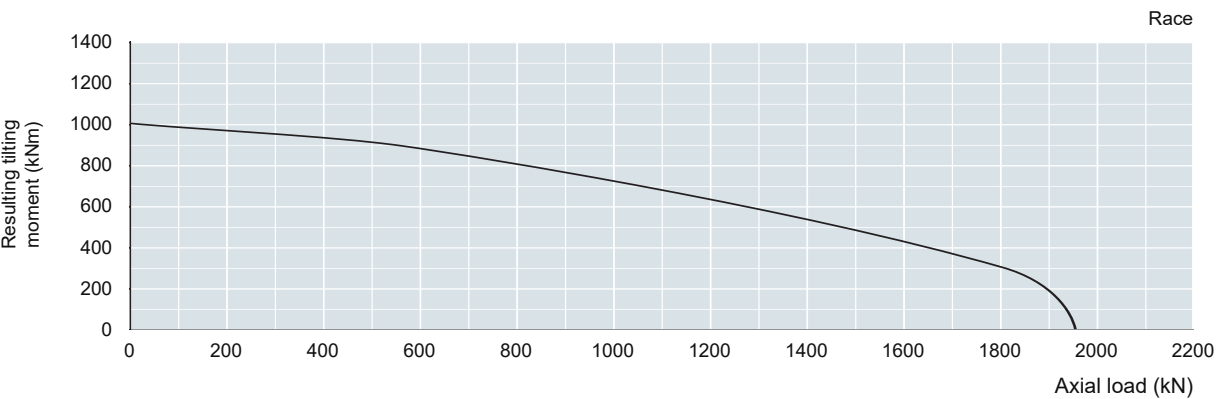

Raceway read-off loads require application factors: static f_{stat} ; utilization f_L .
See source Table1, printed page61. Curve parameter:30,000 full-load rotations.
Application-specific factors are not selected here.

REFERENCE NOTES

Dimensions in mm. Reference drawing; do not scale.
Source: Rothe Erde EN1225; dimensions p58; load chart p58.
Da1398 - 0.20; Di1112; O1255 - 0.20; HZ13/companion12; H90/Hu19; La1360/42xØ22; Li1194/42xM20 blind40; flange21; d1130/m10/z113/b71; Y axial + radial ≥ 0 to 0.07 mm
Rothe Erde 282.30.1275.013 — Product page | MERYDOM

MERYDOM
Single-row profile ball bearing
282.30.1275.013
REFERENCE: Rothe Erde /28
Rev1.0 mm NTS 1/1