

Factory-Verified Replacement

MERYDOM 10-32 0780/0-00367


Certified for interchange with IMO 10-32 0780/0-00367.
This document consolidates the public product record,
complete published specifications, technical media,
source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL	REFERENCE
10-32 0780/0-00367	IMO 10-32 0780/0-00367
SERIES	STRUCTURE
OTHER_STANDARD_BALL Series	Sfere a quattro punti di contatto
OVERALL OD	OVERALL ID
mm	mm
OVERALL HEIGHT	GEAR
mm	Senza dentatura

Published Technical Drawing

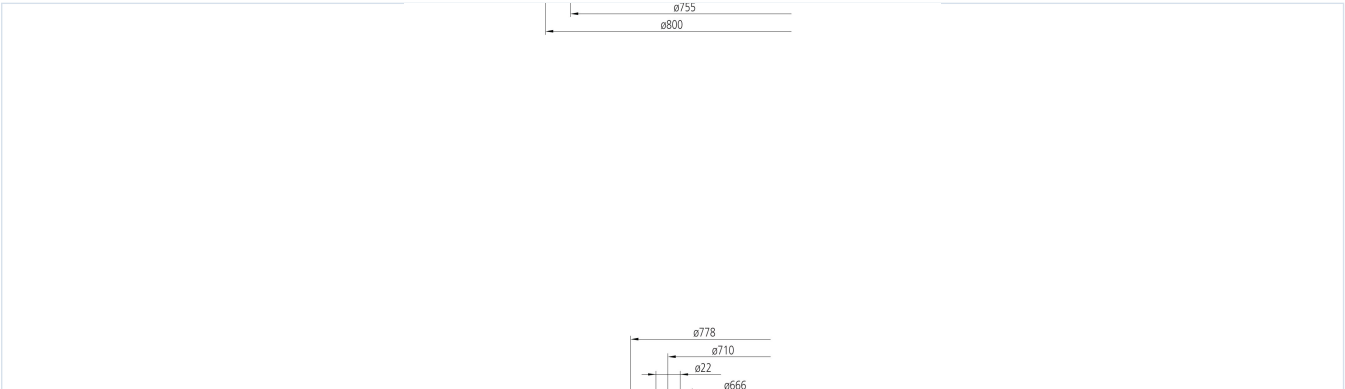

imo-10320780000367-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	10-32 0780/0-00367
Certified interchangeable with	IMO 10-32 0780/0-00367
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	A3UKRCNKHBB7R27NESQHVGEQDQ
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	IMO
Reference series	OTHER_STANDARD_BALL Series
Reference model	10-32 0780/0-00367
Bearing structure	Sfere a quattro punti di contatto
Gear arrangement	Senza dentatura
DIMENSION	
Assembly weight (G)	125 kg
MOUNTING	
Outer ring mounting-hole count (na)	32

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MOUNTING (CONTINUED)	
Inner ring mounting-hole count (ni)	32
PERFORMANCE	
Static radial load rating (Co_rad)	730 kN
Static axial load rating (Co_ax)	1.952 kN
Dynamic radial load rating (C_rad)	385 kN
Dynamic axial load rating (C_ax)	448 kN
PERFORMANCE RATINGS	
Co Rad	730 kN Not simultaneous with other listed dynamic ratings
Co Ax	1.952 kN Not simultaneous with other listed dynamic ratings
C Rad	385 kN Not simultaneous with other listed dynamic ratings
C Ax	448 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	32 holes - See source drawing
Inner ring mounting	32 holes - See source drawing
GEAR INTERFACE	
Integral gear	Not applicable - ungeared bearing
SOURCE TRACEABILITY	
Source document code	IMO_OTHER_STANDARD_BALL_EN
Source file	imo_weitere_standard-kugeldrehverbindungen-en.pdf
PDF page	13

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Printed page	Not published
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	imo-10320780000367-curve.webp SHA-256: 8cdcff1f2e52dcff7e7b30b8927f1a37d2b553eae60466167d055fd2e251d448
Outline Drawing	imo-10320780000367-drawing.webp SHA-256: a8ea4a2849e747a92fd8de6c68a87b3b8f3ddf586779ae629adc97888441f780


Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

— Bolt curve $R_{p0.2}$ Bolt grade 10.9 — Raceway curve

Please adhere strictly to the rules given in the Technical Information section when using above graph!

10-32 0780/0-00367

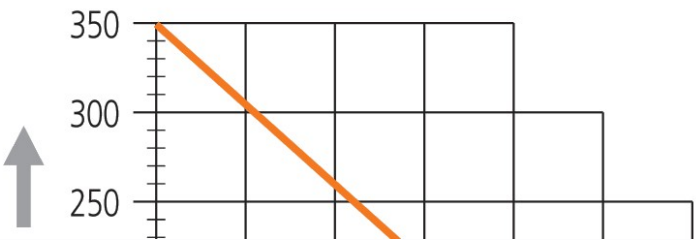

imo-10320780000367-curve.webp | SHA-256: 8cdcff1f2e52dcff7e7b30b8927f1a37d2b553eae60466167d055fd2e251d448

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

A3UKRCNKHBB7R27NESQHVGEQDQ

SOURCE DOCUMENT

IMO_OTHER_STANDARD_BALL_EN

SOURCE FILE

imo_weitere_standard-kugeldrehverbindungen-en.pdf

SOURCE LOCATION

PDF page 13 | Printed page Not published

VERIFICATION

Level 3 - MERYDOM Engineering Verified

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/imo/10-32-0780-0-00367/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.