

Factory-Verified Replacement

MERYDOM VLA 201094 N

Certified for interchange with INA VLA 201094 N. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

VLA 201094 N

SERIES

VLA 20 Series

OVERALL OD

1,198.1 mm

OVERALL HEIGHT

mm

REFERENCE

INA VLA 201094 N

STRUCTURE

Sfere a quattro punti di contatto


OVERALL ID

984 mm

GEAR

Dentatura esterna

Published Technical Drawing

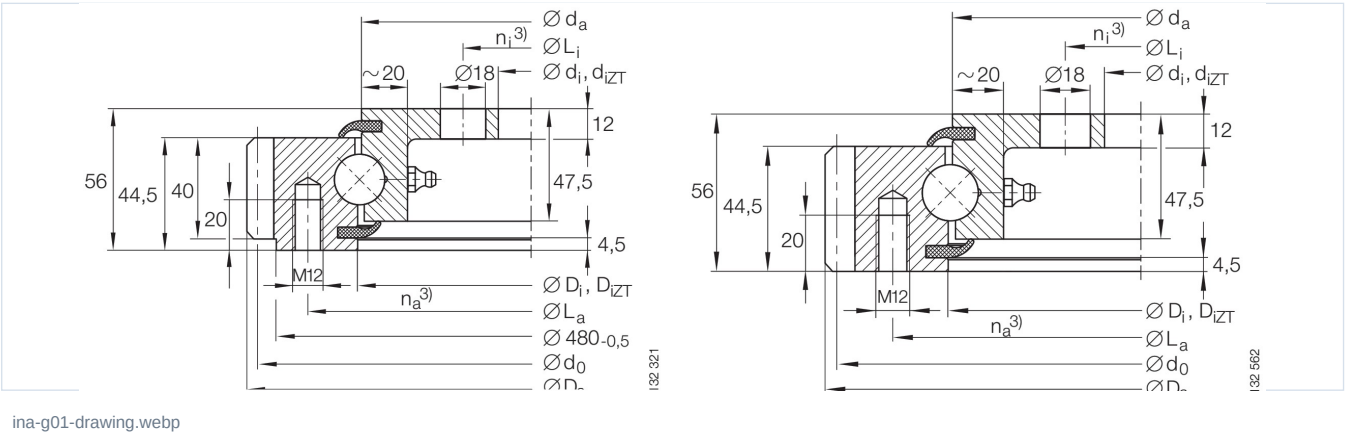

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	VLA 201094 N
Certified interchangeable with	INA VLA 201094 N
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	LM4IGUZFZUMBPKC4P4I54N52
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	INA
Reference series	VLA 20 Series
Reference model	VLA 201094 N
Bearing structure	Sfere a quattro punti di contatto
Gear arrangement	Dentatura esterna
DIMENSION	
Mass (Mass)	83,5 kg
Overall outside diameter (Da)	1.198,1 mm
Overall inside diameter (di)	984+0,7 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Inside centring diameter (diZT)	986 mm
Catalog diameter Di (Di)	1095,5+0,7 mm
Catalog centring diameter DiZT (DiZT)	1.097 mm
Catalog diameter da (da)	1092,5-0,7 mm
MOUNTING	
Outer ring bolt circle (La)	1.135 mm
Outer ring mounting-hole count (na)	22
Inner ring bolt circle (Li)	1.012 mm
Inner ring mounting-hole count (ni)	20
GEAR	
Gear pitch diameter (d0)	1.184 mm
Gear module (m)	8 mm
Gear tooth count (z)	148
PERFORMANCE	
Maximum permissible radial load (Fr perm)	90,9 kN
Normal tooth force (Fznorm)	28,3 kN
Maximum tooth force (Fzmax)	42 kN
Basic dynamic axial load rating (Ca)	244 kN
Basic static axial load rating (C0a)	770 kN
Basic dynamic radial load rating (Cr)	160 kN

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Basic static radial load rating (C _{0r})	290 kN
PERFORMANCE RATINGS	
Rating Radial Static	290 kN Not simultaneous with other listed dynamic ratings
Rating Axial Static	770 kN Not simultaneous with other listed dynamic ratings
Rating Radial Dynamic	160 kN Not simultaneous with other listed dynamic ratings
Rating Axial Dynamic	244 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Max	42 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Normal	28,3 kN Not simultaneous with other listed dynamic ratings
Rating Radial Load Max	90,9 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	22 holes - See source drawing
Inner ring mounting	20 holes - See source drawing
GEAR INTERFACE	
Pitch system	module
Module reference	8 mm
Number of teeth	148
SOURCE TRACEABILITY	
Source document code	INA-SLEWING-RINGS-CATALOGUE-404-2012
Source file	404_de_en_1.pdf
PDF page	54


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.


SOURCE TRACEABILITY (CONTINUED)	
Printed page	52
Source language	EN-DE
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	ina-g01-curve.webp SHA-256: 2caac1c864b5 added53bd9d1e31436acf09dda1d167c8ac24282b1df9f2a a9c8cf
Outline Drawing	ina-g01-drawing.webp SHA-256: e338fcc82ad5e0dba14b2ecf00b36a89b66bda6f2920b5ecee24fa2aa6 adb292

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

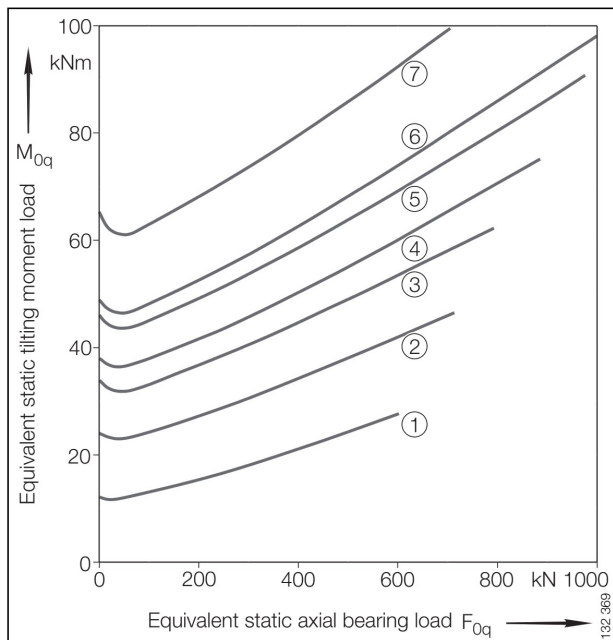

Static limiting load diagram

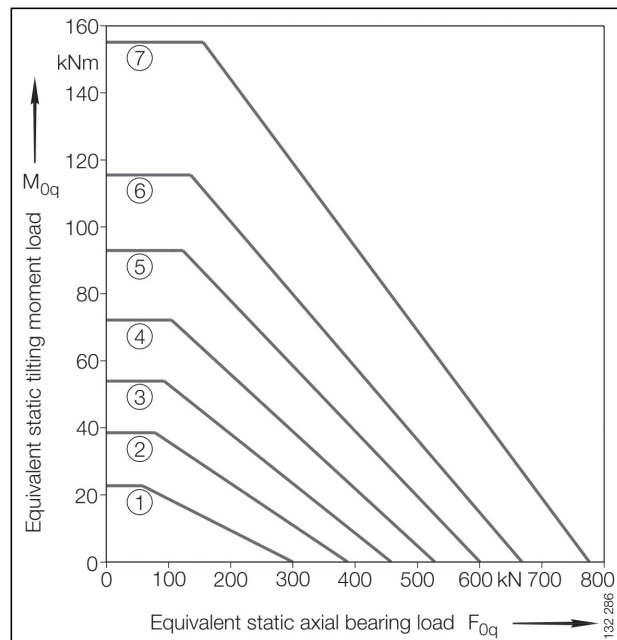

Static limiting load diagram

ina-g01-curve.webp | SHA-256: 2caac1c864b5fdd53bd9d1e31436acf09dda1d167c8ac24282b1df9f2aa9c8cf

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID**LM4IGUZFZUMBPDBKC4P4I54N52****SOURCE DOCUMENT****INA-SLEWING-RINGS-CATALOGUE-404-2012****SOURCE FILE****404_de_en_1.pdf****SOURCE LOCATION****PDF page 54 | Printed page 52****VERIFICATION****Level 3 - MERYDOM Engineering
Verified****REVIEWED BY****MERYDOM Engineering Department**

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/ina/vla-201094-n/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.