

Factory-Verified Replacement

MERYDOM VI070B00

Certified for interchange with La Leonessa VI070B00. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

VI070B00

SERIES

2SI Series

OVERALL OD

705 mm

OVERALL HEIGHT

92 mm

REFERENCE

La Leonessa VI070B00

STRUCTURE

Cuscinetto a sfere a due corone


OVERALL ID

504 mm


GEAR

Dentatura interna

Published Technical Drawing

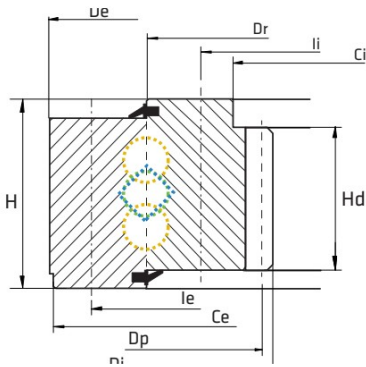

la-leonessa-2si-drawing.webp

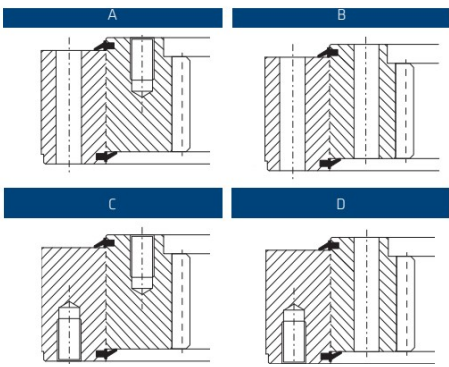

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	VI070B00
Certified interchangeable with	La Leonessa VI070B00
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	JS5FXIBPREDHKVSANV5DKH2LQ7
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	La Leonessa
Reference series	2SI Series
Reference model	VI070B00
Bearing structure	Cuscinetto a sfere a due corone
Gear arrangement	Dentatura interna
DIMENSION	
Mass (P)	103 kg
Overall outside diameter (De)	705 mm
Overall inside diameter (Di)	504 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	92 mm
Dim Dr (Dr)	625 mm
MOUNTING	
Outer ring bolt circle (Ie)	675 mm
Outer ring mounting-hole count (ne)	32
Outer ring mounting-hole specification (Me)	M16
Inner ring bolt circle (Ii)	575 mm
Inner ring mounting-hole count (ni)	32
Inner ring mounting-hole specification (Mi)	M16
GEAR	
Gear module (m)	8 mm
Gear tooth count (z)	65
Gear pitch diameter (Dp)	520 mm
Gear Tooth Height (Hd)	74 mm
PERFORMANCE	
Basic static axial load rating (C0a)	1.940 kN
Static tilting moment rating (M0r)	276 kNm
Normal tooth force (Fnom)	58 kN
Maximum tooth force (Fmax)	116 kN
MISCELLANEOUS	

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MISCELLANEOUS (CONTINUED)	
Pattern (Schema)	B
PERFORMANCE RATINGS	
Rating Axial Static	1.940 kN Not simultaneous with other listed dynamic ratings
Rating Tilting Moment Static	276 kNm Not simultaneous with other listed dynamic ratings
Rating Tooth Force Normal	58 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Max	116 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	32 holes - 32; M16
Inner ring mounting	32 holes - 32; M16
GEAR INTERFACE	
Pitch system	module
Module reference	8 mm
Number of teeth	65
SOURCE TRACEABILITY	
Source document code	LA-LEONESSA-INTERNAL-GEAR-CATALOG-2017
Source file	SLEWING-BEARINGS-WITH-INTERNAL-GEAR.pdf
PDF page	4
Printed page	4
Source language	EN
Original unit system	Metric


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	la-leonessa-2si-static_load_curve.webp SHA-256: 2d07d5007c414f54f7e8476084d020a30af3af05a960e7f690827754e00574cb
Outline Drawing	la-leonessa-2si-drawing.webp SHA-256: 3c0269351f1480df2b4130d7fb5c79552a0896a4f557467d7b138da54c54c490

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

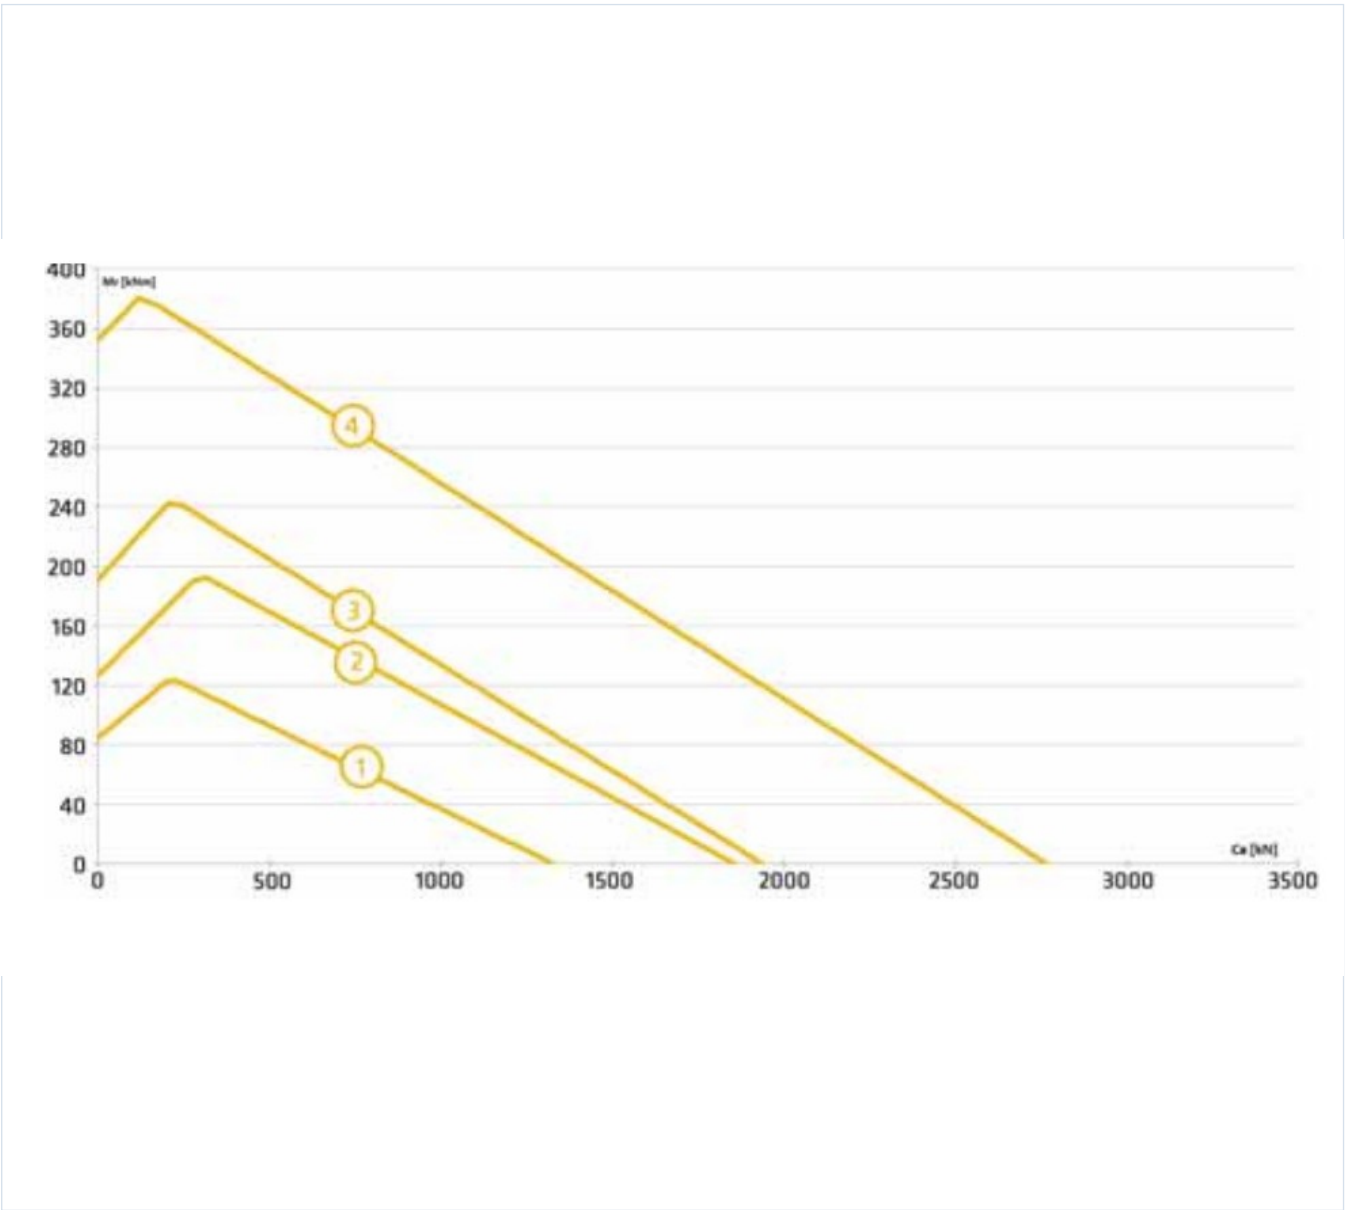

la-leonessa-2si-static_load_curve.webp | SHA-256:
2d07d5007c414f54f7e8476084d020a30af3af05a960e7f690827754e00574cb

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

JS5FXIBPREDHKVSANV5DKH2LQ7

SOURCE FILE

SLEWING-BEARINGS-WITH-INTERNAL-GEAR.pdf

VERIFICATION

**Level 3 - MERYDOM Engineering
Verified**

SOURCE DOCUMENT

LA-LEONESSA-INTERNAL-GEAR-CATALOG-2017

SOURCE LOCATION

PDF page 4 | Printed page 4

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/la-leonessa/vi070b00/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.