

Factory-Verified Replacement

MERYDOM 88-0240-00

Certified for interchange with ROLLIX 88-0240-00. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

88-0240-00

SERIES

88 Series

OVERALL OD

296 mm

OVERALL HEIGHT

30 mm

REFERENCE

ROLLIX 88-0240-00

STRUCTURE

Cuscinetto a rulli di precisione


OVERALL ID

184 mm

GEAR

Senza dentatura

Published Technical Drawing

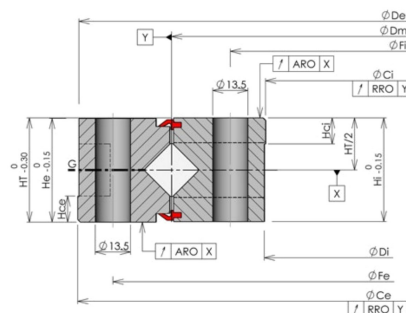

rollix-page-125-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	88-0240-00
Certified interchangeable with	ROLLIX 88-0240-00
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	5R3ANJVHPY6FCL2VZ2LQBH7HWO
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	ROLLIX
Reference series	88 Series
Reference model	88-0240-00
Bearing structure	Cuscinetto a rulli di precisione
Gear arrangement	Senza dentatura
DIMENSION	
Overall outside diameter (Dia De)	296 mm
Overall inside diameter (Dia Di)	184 mm
Overall height (HT)	30 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Outer ring height (He)	30 mm
Inner ring height (Hi)	30 mm
Assembly weight (Weight)	9 kg
MOUNTING	
Outer ring pilot diameter (Dia Ce)	297 mm
Inner ring pilot diameter (Dia Ci)	183 mm
Outer ring pilot height (Hce)	8 mm
Inner ring pilot height (Hci)	10 mm
Outer ring bolt circle (Fe)	275 mm
Outer ring mounting-hole count (Ne*)	12
Inner ring bolt circle (Fi)	205 mm
Inner ring mounting-hole count (Ni*)	12
PERFORMANCE	
Outer ring axial run-out (BE (ARO))	10 um
Inner ring axial run-out (BI (ARO))	10 um
Outer ring radial run-out (BE (RRO))	10 um
Inner ring radial run-out (BI (RRO))	10 um
Maximum unloaded starting torque (Maximum starting torque)	25 Nm
Maximum allowable rotation speed (Maximum allowable speed)	160 rpm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE RATINGS	
Rating Starting Torque Max	25 Nm Not simultaneous with other listed dynamic ratings
Axial Runout Outer	10 um Not simultaneous with other listed dynamic ratings
Axial Runout Inner	10 um Not simultaneous with other listed dynamic ratings
Rating Speed Max	160 rpm Not simultaneous with other listed dynamic ratings
Radial Runout Outer	10 um Not simultaneous with other listed dynamic ratings
Radial Runout Inner	10 um Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	12 holes - See source drawing
Inner ring mounting	12 holes - Hci 10 mm
GEAR INTERFACE	
Integral gear	Not applicable - ungeared bearing
SOURCE TRACEABILITY	
Source document code	ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
Source file	ROLLIX.pdf
PDF page	125
Printed page	125
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	rollix-page-125-curve.webp SHA-256: b9b76ee925131bd7a966edc2d46a4114a1e6dff9332d821fc019e1e8ec dde8d2


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PUBLISHED TECHNICAL MEDIA (CONTINUED)	
Outline Drawing	rollix-page-125-drawing.webp SHA-256: e9915152c61e970cad1cb63e524e646ac8d4f0daf839be58e8de8c349f92a28a

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

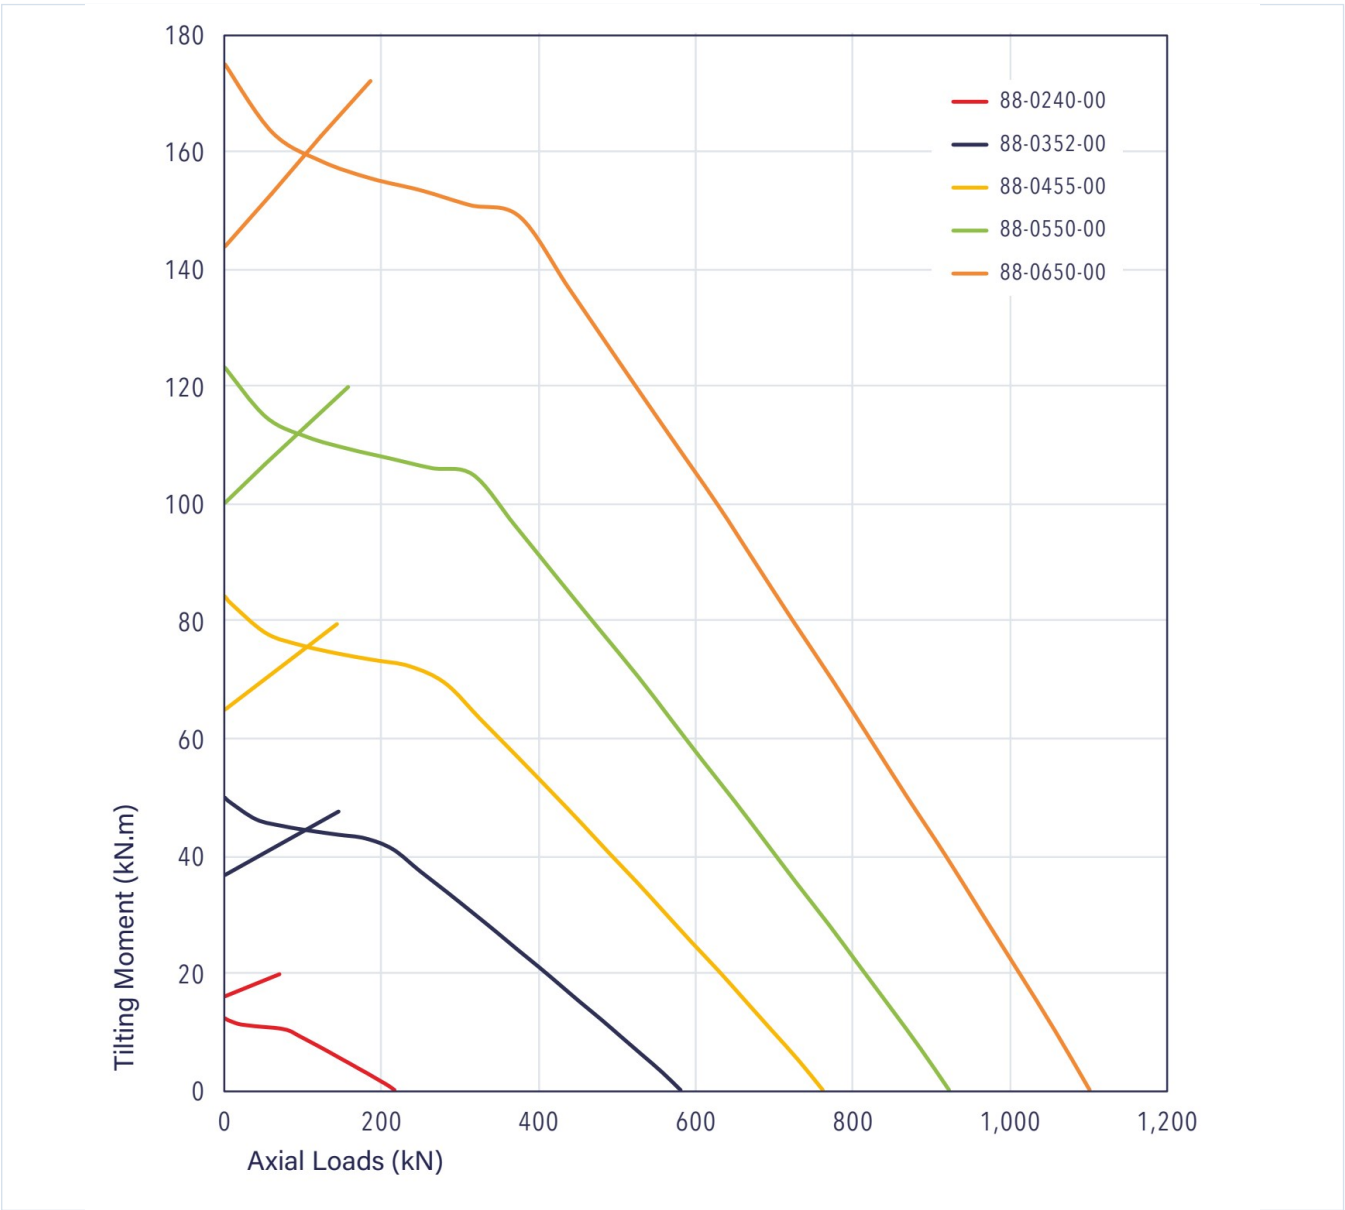

rollix-page-125-curve.webp | SHA-256: b9b76ee925131bd7a966edc2d46a4114a1e6dff9332d821fc019e1e8ecdde8d2

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID 5R3ANJVHPY6FCL2VZ2LQBH7HWO	SOURCE DOCUMENT ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
SOURCE FILE ROLLIX.pdf	SOURCE LOCATION PDF page 125 Printed page 125
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/rollix/88-0240-00/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.