

Factory-Verified Replacement

MERYDOM 88-1085-60

Certified for interchange with ROLLIX 88-1085-60. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

88-1085-60

SERIES

88 Series

OVERALL OD

mm

OVERALL HEIGHT

132 mm

REFERENCE

ROLLIX 88-1085-60

STRUCTURE

Cuscinetto a rulli di precisione


OVERALL ID

mm

GEAR

Senza dentatura

Published Technical Drawing

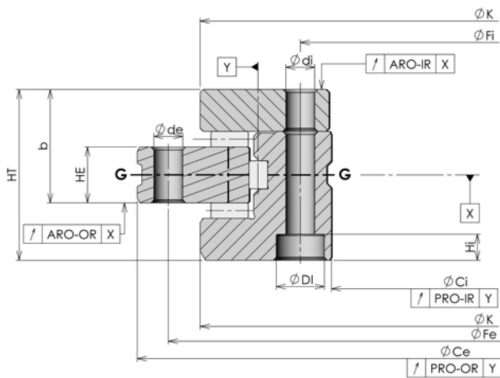

rollix-page-129-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	88-1085-60
Certified interchangeable with	ROLLIX 88-1085-60
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	O76B24WKD5WXFAHGFK2IHV3D47
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	ROLLIX
Reference series	88 Series
Reference model	88-1085-60
Bearing structure	Cuscinetto a rulli di precisione
Gear arrangement	Senza dentatura
DIMENSION	
Raceway diameter (Dia Dm)	1.085 mm
Catalog dimension K (K)	1.130 mm
Overall height (HT)	132 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Outer ring height (He)	40 mm
Catalog width b (b)	86 mm
Assembly weight (Weight)	312 kg
MOUNTING	
Outer ring pilot diameter (Dia Ce)	1.200 mm
Inner ring pilot diameter (Dia Ci)	950 mm
Outer ring bolt circle (Fe)	1.160 mm
Outer mounting diameter de (de)	18 mm
Outer ring mounting-hole count (Ne*)	54
Inner ring bolt circle (Fi)	990 mm
Catalog mounting diameter Di (Di)	26 mm
Inner mounting diameter di (di)	18 mm
Inner ring mounting-hole count (Ni*)	58
PERFORMANCE	
Outer ring axial run-out (BE (ARO))	12 um
Inner ring axial run-out (BI (ARO))	12 um
Outer ring radial run-out (BE (RRO))	12 um
Inner ring radial run-out (BI (RRO))	12 um
Maximum unloaded starting torque (Maximum starting torque)	600 Nm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Maximum allowable rotation speed (Maximum allowable speed)	46 rpm
PERFORMANCE RATINGS	
Rating Starting Torque Max	600 Nm Not simultaneous with other listed dynamic ratings
Axial Runout Outer	12 um Not simultaneous with other listed dynamic ratings
Axial Runout Inner	12 um Not simultaneous with other listed dynamic ratings
Rating Speed Max	46 rpm Not simultaneous with other listed dynamic ratings
Radial Runout Outer	12 um Not simultaneous with other listed dynamic ratings
Radial Runout Inner	12 um Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	54 holes - de 18 mm
Inner ring mounting	58 holes - Di 26 mm; di 18 mm
GEAR INTERFACE	
Integral gear	Not applicable - ungeared bearing
SOURCE TRACEABILITY	
Source document code	ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
Source file	ROLLIX.pdf
PDF page	129
Printed page	129
Source language	EN
Original unit system	Metric


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	rollix-page-129-curve.webp SHA-256: 3e123f354056b92eb5541287a3a36aba0377bb3b40feaf1c264e4957dc f25a0d
Outline Drawing	rollix-page-129-drawing.webp SHA-256: 0c4833bcdadef31a26777a22e7bf154c3e2bf553c7299b1581a78f6ba 65a8b4

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

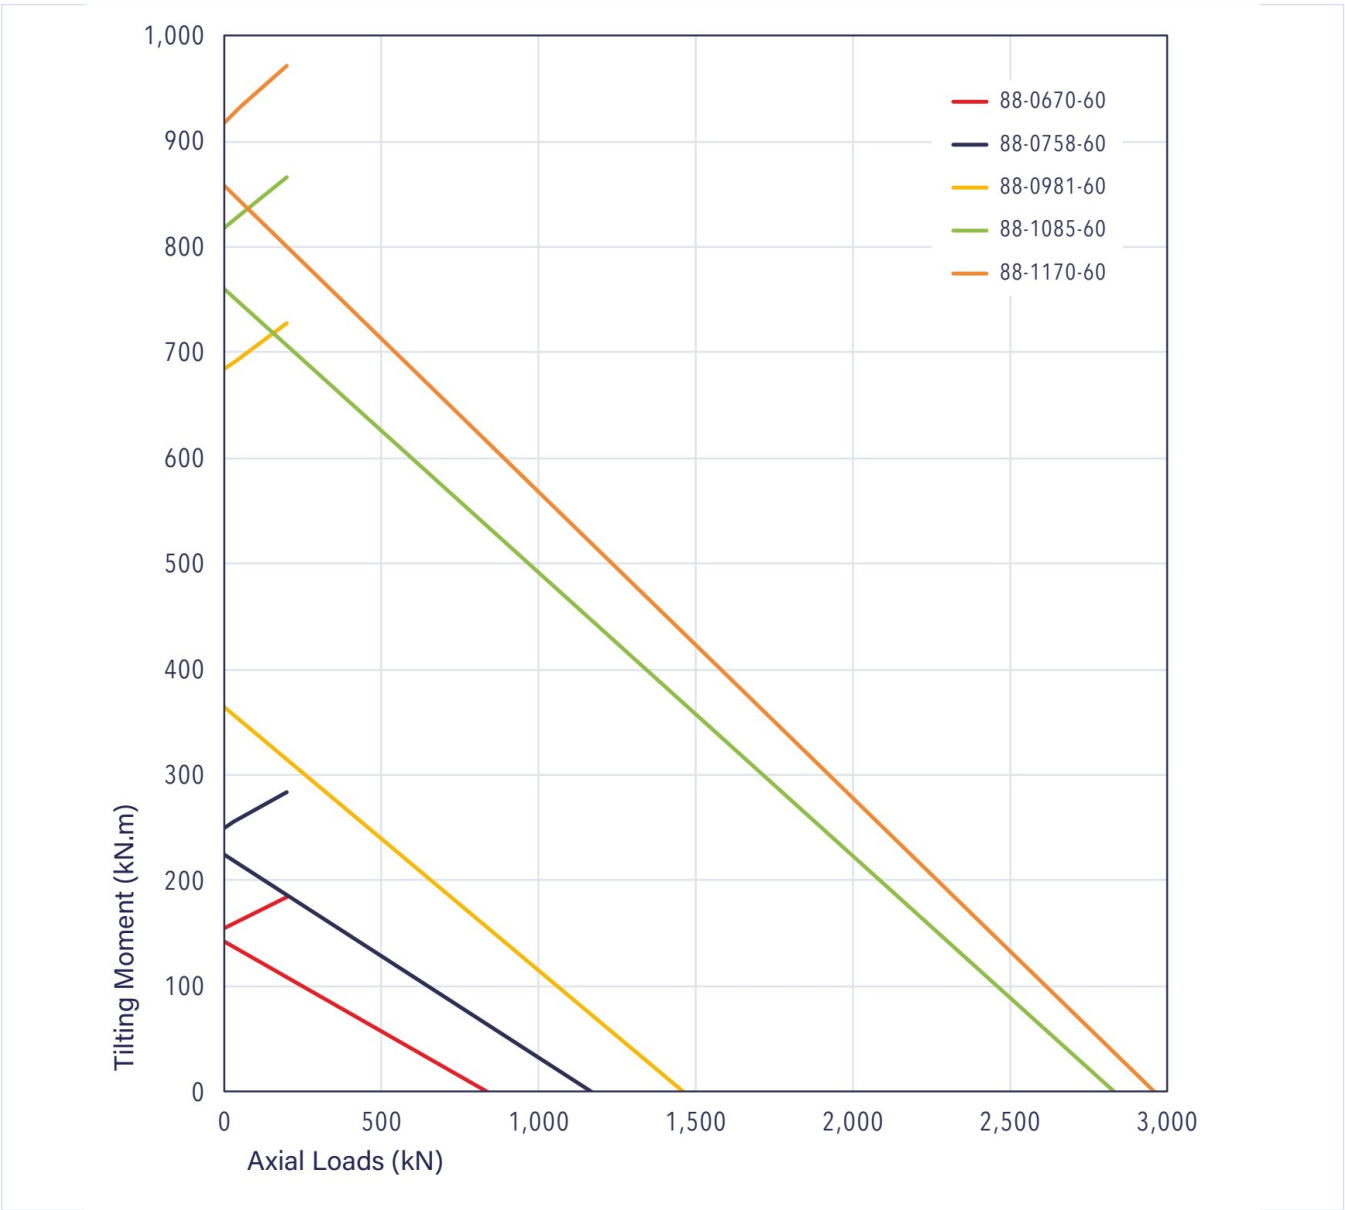

rollix-page-129-curve.webp | SHA-256: 3e123f354056b92eb5541287a3a36aba0377bb3b40feaf1c264e4957dcf25a0d

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID O76B24WKD5WXFAHGFK2IHV3D47	SOURCE DOCUMENT ROLLIX-CATALOGUE-SLEWING-RINGS-2024-07
SOURCE FILE ROLLIX.pdf	SOURCE LOCATION PDF page 129 Printed page 129
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/rollix/88-1085-60/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.