

Factory-Verified Replacement

MERYDOM 1088I-12B-200

Certified for interchange with Tibet Makina 1088I-12B-200. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

1088I-12B-200

REFERENCE

Tibet Makina 1088I-12B-200

SERIES

DOUBLE_ROW_BALL_INTERNAL Series

STRUCTURE

Cuscinetto a sfere a due corone

OVERALL OD

1,175 mm

OVERALL ID

962 mm


OVERALL HEIGHT

97 mm

GEAR

Dentatura interna

Published Technical Drawing

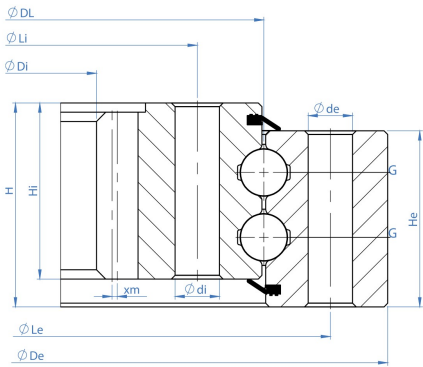

double_row_ball_internal-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	1088I-12B-200
Certified interchangeable with	Tibet Makina 1088I-12B-200
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	AHJEZHCCDHWCR6QZ2WKW2QTUMO
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	Tibet Makina
Reference series	DOUBLE_ROW_BALL_INTERNAL Series
Reference model	1088I-12B-200
Bearing structure	Cuscinetto a sfere a due corone
Gear arrangement	Dentatura interna
DIMENSION	
Mass (Kg)	215 kg
Overall outside diameter (De)	1.175 mm
Overall inside diameter (Di)	962 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	97 mm
Outer ring height (He)	88 mm
Inner ring height (Hi)	88 mm
MOUNTING	
Outer ring bolt circle (Le)	1.134 mm
Inner ring bolt circle (Li)	1.040 mm
Outer ring mounting-hole count (ne)	48
Inner ring mounting-hole count (ni)	48
Outer ring mounting-hole specification (de)	17 mm
Inner ring mounting-hole specification (di)	17 mm
GEAR	
Gear module (m)	10 mm
Gear tooth count (z)	98
PERFORMANCE	
Normal tooth force (Ft_normal)	73 kN
Maximum tooth force (Ft_max)	146 kN
MISCELLANEOUS	
Raceway Pitch Diameter (DL)	1.088 mm
Lubrication Zerk Count (G)	4
PERFORMANCE RATINGS	
Rating Tooth Force Normal	73 kN Not simultaneous with other listed dynamic ratings


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE RATINGS (CONTINUED)	
Rating Tooth Force Max	146 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	48 holes - de 17 mm
Inner ring mounting	48 holes - di 17 mm
GEAR INTERFACE	
Pitch system	module
Module reference	10 mm
Number of teeth	98
SOURCE TRACEABILITY	
Source document code	TIBET_MAKINA_2015_CATALOG
Source file	tibet_makina_2015.pdf
PDF page	43
Printed page	43
Source language	TR-EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	double_row_ball_internal-static-load-curve.webp SHA-256: e47a0610ee1623aed5cf4cbad71ef922912a8573c68b591483dac31ce968ad0d
Outline Drawing	double_row_ball_internal-drawing.webp SHA-256: 40e4cecef89ad40d0f86f78bce0f6f572279c5a4d7b10f4480424d33c3a70350

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

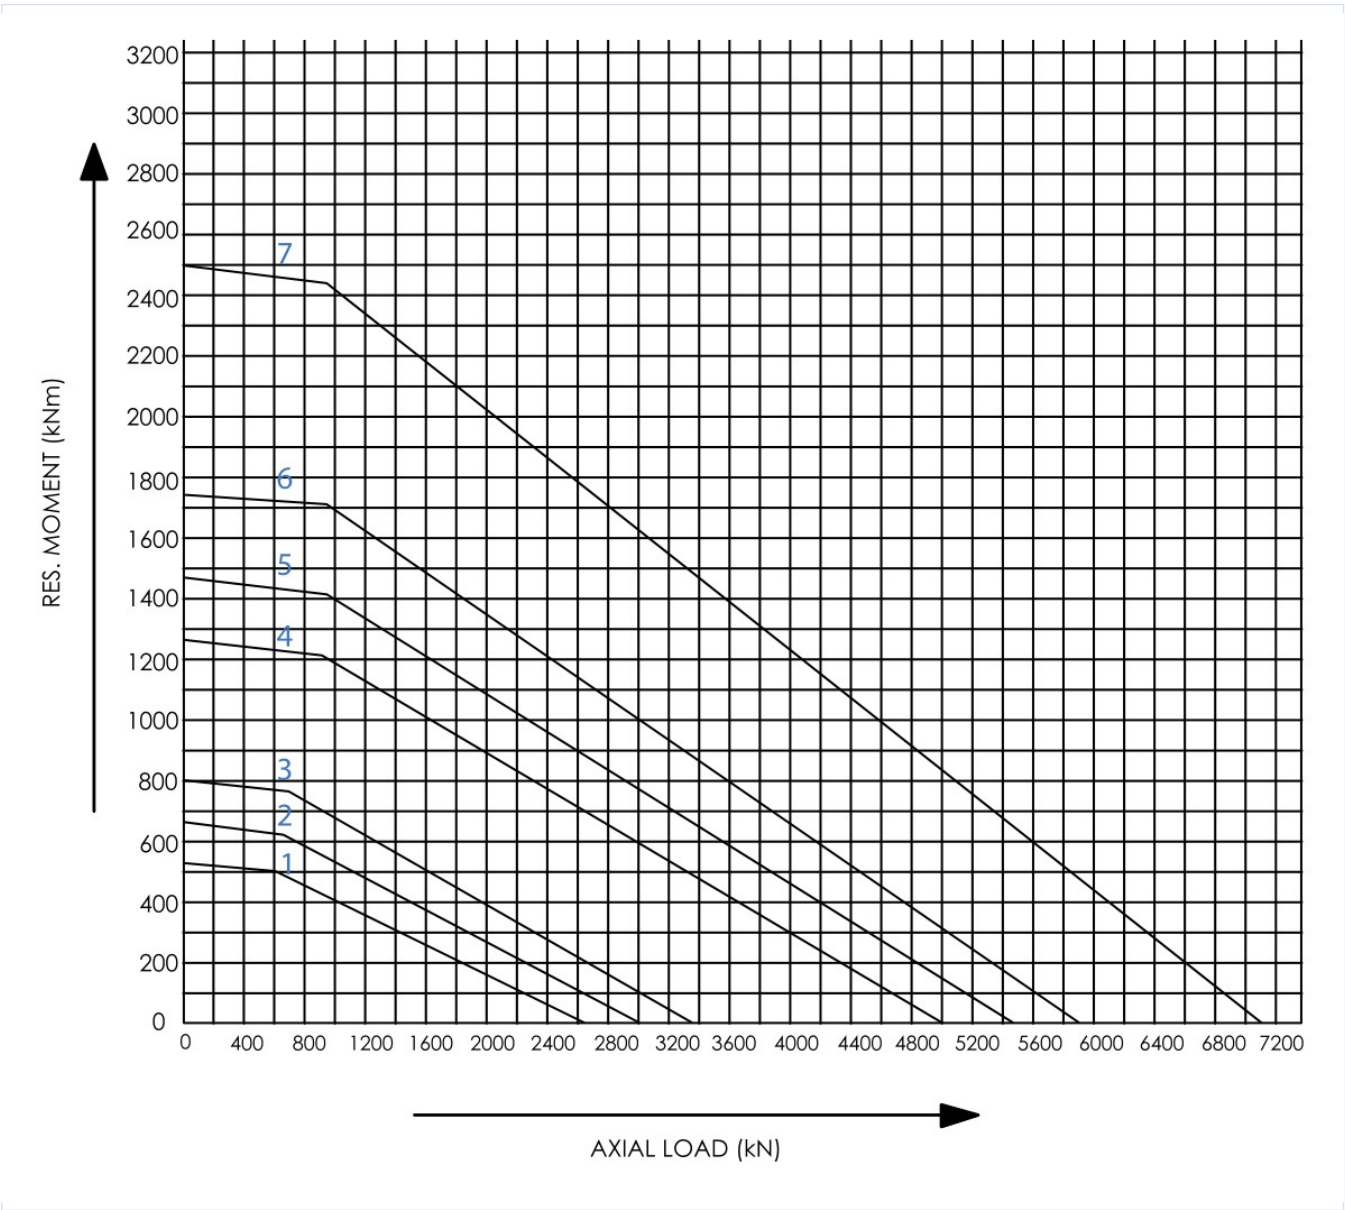

double_row_ball_internal-static-load-curve.webp | SHA-256:
e47a0610ee1623aed5cf4cbad71ef922912a8573c68b591483dac31ce968ad0d

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID**AHJEZHCCDHWCR6QZ2WKW2QTUMO****SOURCE DOCUMENT****TIBET_MAKINA_2015_CATALOG****SOURCE FILE****tibet_makina_2015.pdf****SOURCE LOCATION****PDF page 43 | Printed page 43****VERIFICATION****Level 3 - MERYDOM Engineering
Verified****REVIEWED BY****MERYDOM Engineering Department**

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170Product page: <https://rotnex.com/it/prodotti/cuscinetti-di-rotazione-sostitutivi/tibet-makina/1088i-12b-200/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.