

Factory-Verified Replacement

MERYDOM V30E087

Certified for interchange with La Leonessa V30E087. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

V30E087

SERIES

1RE Series

OVERALL OD

1,476 mm

OVERALL HEIGHT

122 mm

REFERENCE

La Leonessa V30E087

STRUCTURE

Four-point contact ball

OVERALL ID

1,085 mm

GEAR

External gear

Published Technical Drawing



la-leonessa-1re-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	V30E087
Certified interchangeable with	La Leonessa V30E087
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	WD2ASN2LIR2BQDMN2KYMJHLS4
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	La Leonessa
Reference series	1RE Series
Reference model	V30E087
Bearing structure	Four-point contact ball
Gear arrangement	External gear
DIMENSION	
Mass (P)	540 kg
Overall outside diameter (De)	1,476 mm
Overall inside diameter (Di)	1,085 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	122 mm
Dim Dr (Dr)	1,247.5 mm
MOUNTING	
Outer ring bolt circle (Ie)	1,350 mm
Outer ring mounting-hole count (ne)	40
Outer ring mounting-hole specification (Me)	M24
Inner ring bolt circle (Ii)	1,150 mm
Inner ring mounting-hole count (ni)	40
Inner ring mounting-hole specification (Mi)	M24
GEAR	
Gear module (m)	10 mm
Gear tooth count (z)	144
Addendum modification product x^*m (xm)	8.6 mm
Liebherr catalogue gear dimension k^*m (km)	0.6 mm
Gear pitch diameter (Dp)	1,457.2 mm
Gear Tooth Height (Hd)	89 mm
PERFORMANCE	
Basic static axial load rating (C0a)	5,410 kN
Static tilting moment rating (M0r)	1,336 kNm
Normal tooth force (Fnom)	100 kN

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Maximum tooth force (Fmax)	200 kN
MISCELLANEOUS	
Pattern (Schema)	B
PERFORMANCE RATINGS	
Rating Axial Static	5,410 kN Not simultaneous with other listed dynamic ratings
Rating Tilting Moment Static	1,336 kNm Not simultaneous with other listed dynamic ratings
Rating Tooth Force Normal	100 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Max	200 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	40 holes - 40; M24
Inner ring mounting	40 holes - 40; M24
GEAR INTERFACE	
Pitch system	module
Module reference	10 mm
Number of teeth	144
SOURCE TRACEABILITY	
Source document code	LA-LEONESSA-EXTERNAL-GEAR-CATALOG-2017
Source file	SLEWING-BEARINGS-WITH-EXTERNAL-GEAR.pdf
PDF page	8
Printed page	8
Source language	EN


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	la-leonessa-1re-static_load_curve.webp SHA-256: d7aae043a7185155fb61d59e50819f72c59987082f018cd5cc43cc5387066075
Outline Drawing	la-leonessa-1re-drawing.webp SHA-256: 9def12f376fbd9bc222f66ab0503412bd5a475fdfe624e4dbfe0ca549ea4d61f

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

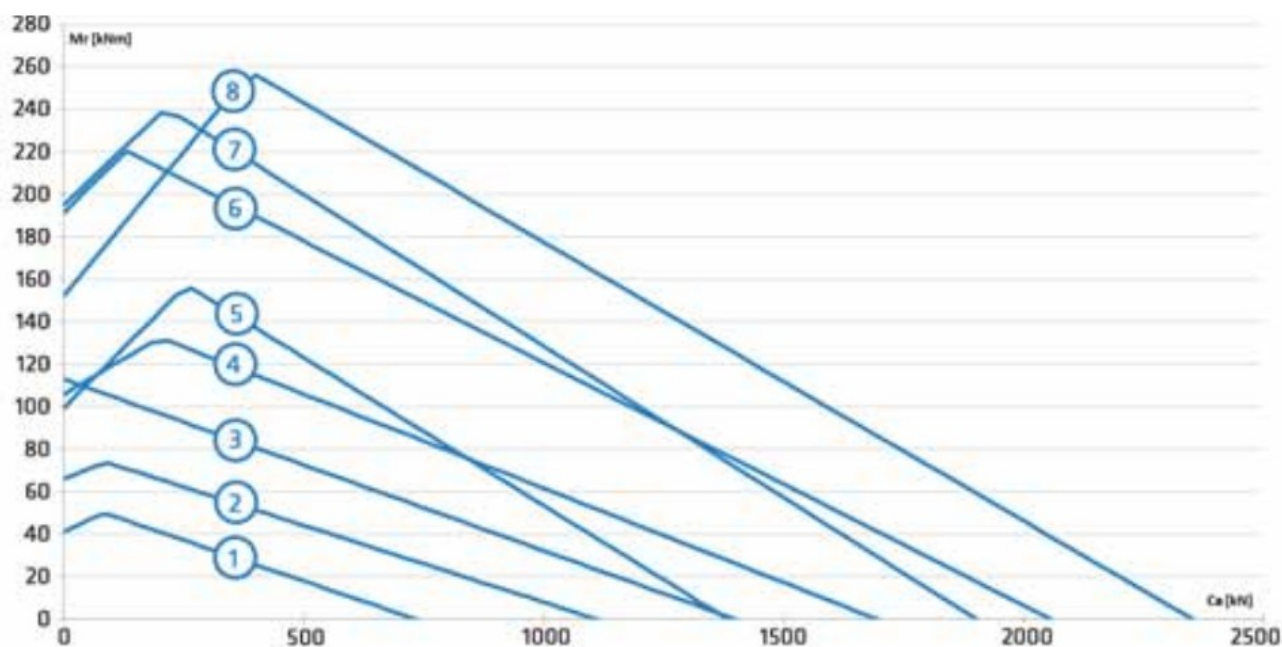

la-leonessa-1re-static_load_curve.webp | SHA-256:
d7aae043a7185155fb61d59e50819f72c59987082f018cd5cc43cc5387066075

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

WD2ASN2LIR2BQDMN2KYMJHLS4

SOURCE FILE

**SLEWING-BEARINGS-WITH-EXTERNAL-GEAR.
pdf**

VERIFICATION

**Level 3 - MERYDOM Engineering
Verified**

SOURCE DOCUMENT

**LA-LEONESSA-EXTERNAL-GEAR-CATALOG-20
17**

SOURCE LOCATION

PDF page 8 | Printed page 8

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/products/slewing-bearing-replacements/la-leonessa/v30e087/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.