

Factory-Verified Replacement

MERYDOM I.340.16.00.D.1

Certified for interchange with Torriani Gianni I.340.16.00.D.1. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL
I.340.16.00.D.1

REFERENCE
Torriani Gianni I.340.16.00.D.1

SERIES
I_16_22_D Series

STRUCTURE
Esferas de contato de quatro pontos


OVERALL OD
340 mm

OVERALL ID
216 mm

OVERALL HEIGHT
39 mm

GEAR
Engrenagem interna

Published Technical Drawing

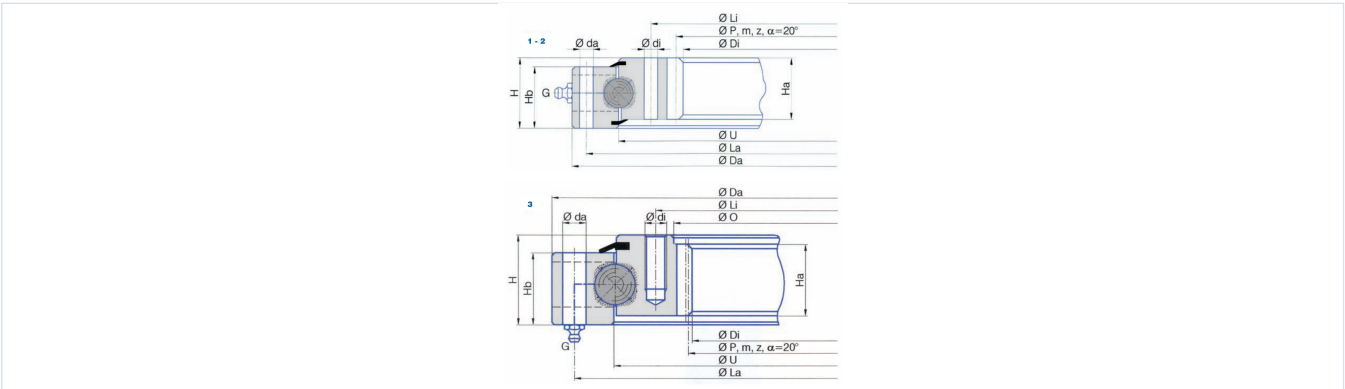

i_16_22_d-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	I.340.16.00.D.1
Certified interchangeable with	Torriani Gianni I.340.16.00.D.1
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	2LDTMWR5XIOLUQFG5E6BPBTMKX
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	Torriani Gianni
Reference series	I_16_22_D Series
Reference model	I.340.16.00.D.1
Bearing structure	Esferas de contato de quatro pontos
Gear arrangement	Engrenagem interna
DIMENSION	
Overall outside diameter (Da)	340 mm
Torriani catalogue dimension U (U)	288 mm
Overall inside diameter (Di)	216 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Torriani catalogue dimension Ha (Ha)	34 mm
Torriani catalogue dimension Hb (Hb)	34 mm
Overall height (H)	39 mm
Mass (Kg)	12 kg
MOUNTING	
Outer ring bolt circle (La)	324 mm
Outer ring mounting-hole count (na)	20
Outer ring mounting-hole specification (da)	9 mm
Inner ring bolt circle (Li)	252 mm
Inner ring mounting-hole count (ni)	20
Inner ring mounting-hole specification (di)	9 mm
GEAR	
Gear pitch diameter (P)	224 mm
Gear module (m)	4 mm
Gear tooth count (z)	56
PERFORMANCE	
Normal tooth force (Fz_normal)	8 kN
Maximum tooth force (Fz_max)	16 kN
PERFORMANCE RATINGS	
Rating Tooth Force Normal	8 kN Not simultaneous with other listed dynamic ratings


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE RATINGS (CONTINUED)	
Rating Tooth Force Max	16 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	20 holes - da 9 mm
Inner ring mounting	20 holes - di 9 mm
GEAR INTERFACE	
Pitch system	module
Module reference	4 mm
Number of teeth	56
SOURCE TRACEABILITY	
Source document code	TORRIANI_GIANNI_BALL_BEARINGS_CATALOG
Source file	catalogo-torriani-cuscinetti-a-sfere.pdf
PDF page	13
Printed page	13
Source language	IT-EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	i_16_22_d-static-load-curve.webp SHA-256: a1f8dbb33d04a7d5e1d85ebb8c1ee82884c01862cd145477948b1d7f5230d90d
Outline Drawing	i_16_22_d-drawing.webp SHA-256: 5d060bc99620dee44e8cac69abb59956c0b988d734ab8ea31d1f1dedca d3a34c

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

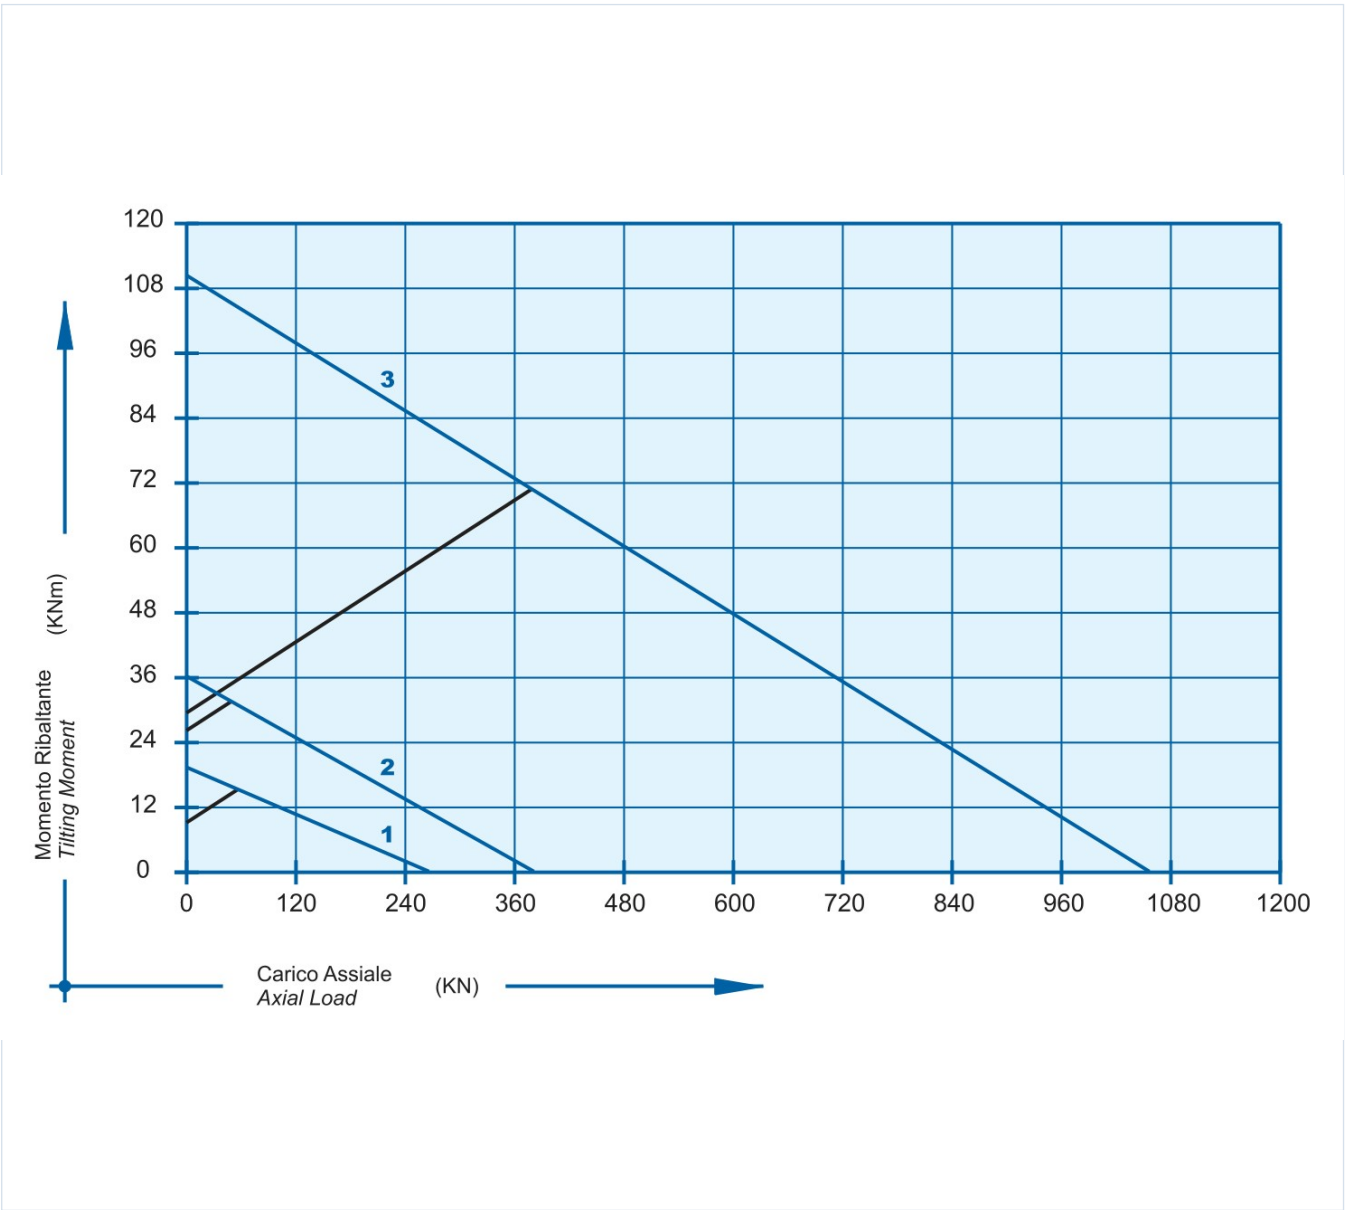

i_16_22_d-static-load-curve.webp | SHA-256: a1f8dbb33d04a7d5e1d85ebb8c1ee82884c01862cd145477948b1d7f5230d90d

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

2LDTMWR5XIOLUQFG5E6BPBTMKX

SOURCE FILE

catalogo-torriani-cuscinetti-a-sfere
.pdf

VERIFICATION

Level 3 - MERYDOM Engineering
Verified

SOURCE DOCUMENT

TORRIANI_GIANNI_BALL_BEARINGS_CATALOG

SOURCE LOCATION

PDF page 13 | Printed page 13

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/pt/produtos/rolamentos-de-giro-de-substituicao/torriani-gianni/i-340-16-00-d-1/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.