

Factory-Verified Replacement

MERYDOM VLI 200644 N

Certified for interchange with INA VLI 200644 N. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

VLI 200644 N

SERIES

VLI 20 Series

OVERALL OD

748 mm

OVERALL HEIGHT

mm

REFERENCE

INA VLI 200644 N

STRUCTURE

D rt nokta teması bilyal


OVERALL ID

546 mm

GEAR

ten di li

Published Technical Drawing

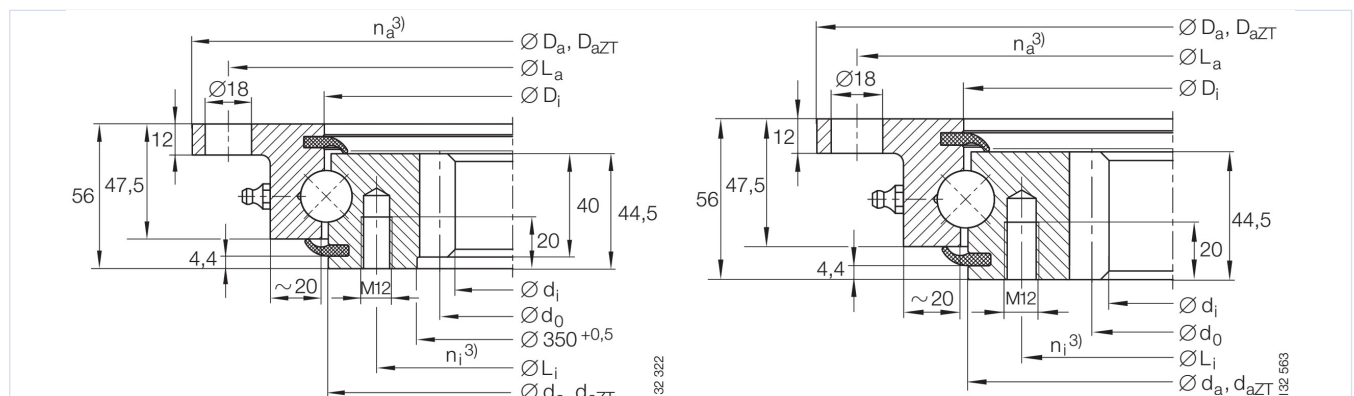

ina-g02-drawing.webp

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	VLI 200644 N
Certified interchangeable with	INA VLI 200644 N
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	OIE5RXSTEMENNFQPGWHU5HMXKQ
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	INA
Reference series	VLI 20 Series
Reference model	VLI 200644 N
Bearing structure	D rt nokta temasl bilyal
Gear arrangement	ten di li
DIMENSION	
Mass (Mass)	45 kg
Overall outside diameter (Da)	748-0,6 mm
Outside centring diameter (DaZT)	746 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall inside diameter (di)	546 mm
Catalog diameter Di (Di)	645,5+0,6 mm
Catalog diameter da (da)	642,5-0,6 mm
Catalog centring diameter daZT (daZT)	641 mm
MOUNTING	
Outer ring bolt circle (La)	720 mm
Outer ring mounting-hole count (na)	12
Inner ring bolt circle (Li)	605 mm
Inner ring mounting-hole count (ni)	18
GEAR	
Gear pitch diameter (d0)	558 mm
Gear module (m)	6 mm
Gear tooth count (z)	93
PERFORMANCE	
Maximum permissible radial load (Fr perm)	74,3 kN
Normal tooth force (Fznorm)	23,7 kN
Maximum tooth force (Fzmax)	35 kN
Basic dynamic axial load rating (Ca)	200 kN
Basic static axial load rating (C0a)	455 kN
Basic dynamic radial load rating (Cr)	131 kN

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Basic static radial load rating (C _{0r})	171 kN
PERFORMANCE RATINGS	
Rating Radial Static	171 kN Not simultaneous with other listed dynamic ratings
Rating Axial Static	455 kN Not simultaneous with other listed dynamic ratings
Rating Radial Dynamic	131 kN Not simultaneous with other listed dynamic ratings
Rating Axial Dynamic	200 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Max	35 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Normal	23,7 kN Not simultaneous with other listed dynamic ratings
Rating Radial Load Max	74,3 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	12 holes - See source drawing
Inner ring mounting	18 holes - See source drawing
GEAR INTERFACE	
Pitch system	module
Module reference	6 mm
Number of teeth	93
SOURCE TRACEABILITY	
Source document code	INA-SLEWING-RINGS-CATALOGUE-404-2012
Source file	404_de_en_1.pdf
PDF page	56


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.


SOURCE TRACEABILITY (CONTINUED)	
Printed page	54
Source language	EN-DE
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	ina-g02-curve.webp SHA-256: 67b1110bb78cbb8ad73ff038dd22c2e522e8f81299dd1fd561b69d622dc87819
Outline Drawing	ina-g02-drawing.webp SHA-256: bc168375639e36d3e8c04c1abd5d716b56de2ddddf269d674cd7d75bed7b8b1b

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

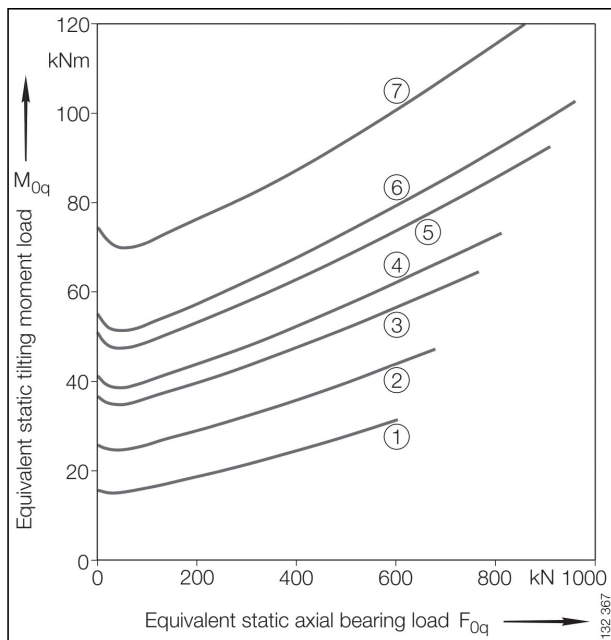

Static limiting load diagram

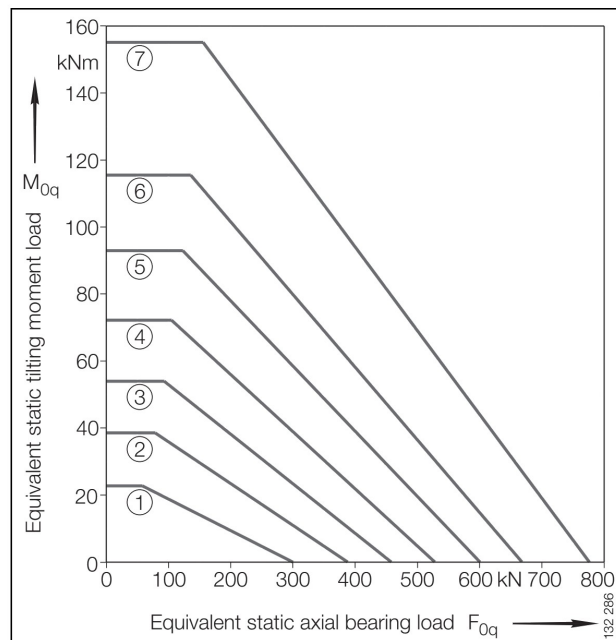

Static limiting load diagram

ina-g02-curve.webp | SHA-256: 67b1110bb78cbb8ad73ff038dd22c2e522e8f81299dd1fd561b69d622dc87819

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID

OIE5RXSTEMENNFQPGWHU5HMXKQ

SOURCE DOCUMENT

INA-SLEWING-RINGS-CATALOGUE-404-2012

SOURCE FILE

404_de_en_1.pdf

SOURCE LOCATION

PDF page 56 | Printed page 54

VERIFICATION

Level 3 - MERYDOM Engineering
Verified

REVIEWED BY

MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1 Confirm the exact model designation and all installation-envelope dimensions.
- 2 Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3 Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4 Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5 Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6 Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/tr/urunler/muadil-doner-tabla-rulmanlari/ina/vli-200644-n/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.