

Factory-Verified Replacement

MERYDOM V30I139

Certified for interchange with La Leonessa V30I139. This document consolidates the public product record, complete published specifications, technical media, source traceability and engineering confirmation notes.

LEVEL 3 - MERYDOM ENGINEERING VERIFIED

Reviewed by MERYDOM Engineering Department. Final application approval must confirm loads, duty cycle, mounting rigidity, bolt capacity, lubrication and operating conditions.

MERYDOM MODEL

V30I139

SERIES

1RI Series

OVERALL OD

1,100 mm

OVERALL HEIGHT

95 mm

REFERENCE

La Leonessa V30I139

STRUCTURE

D rt nokta temasl bilyal


OVERALL ID

785 mm

GEAR

ten di li

Published Technical Drawing

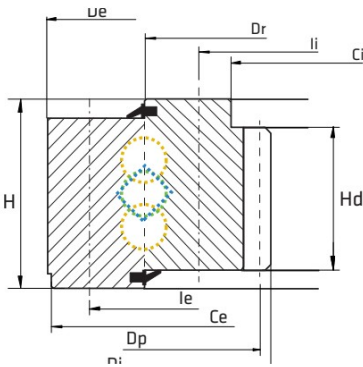

la-leonessa-1ri-drawing.webp



Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

MERYDOM CERTIFIED PRODUCT	
Product brand	MERYDOM
MERYDOM model	V30I139
Certified interchangeable with	La Leonessa V30I139
Verification status	Level 3 - MERYDOM Engineering Verified
Reviewed by	MERYDOM Engineering Department
Public record UID	FQZYWI522AMGIDWBAMEHENPKBK
MATERIALS	
Configurable ring material options	42CrMo / 50Mn
Seal material	NBR - Nitrile rubber
Configurable spacer material options	Engineering nylon / Brass
IDENTIFICATION	
Reference brand	La Leonessa
Reference series	1RI Series
Reference model	V30I139
Bearing structure	D rt nokta temasl bilyal
Gear arrangement	ten di li
DIMENSION	
Mass (P)	275 kg
Overall outside diameter (De)	1 100 mm
Overall inside diameter (Di)	785 mm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

DIMENSION (CONTINUED)	
Overall height (H)	95 mm
Dim Dr (Dr)	953,5 mm
Dim Centering External (Ce)	1.090 0/-0,3 mm
MOUNTING	
Outer ring bolt circle (Ie)	1 030 mm
Outer ring mounting-hole count (ne)	22
Outer ring mounting-hole specification (Me)	M20
Inner ring bolt circle (Ii)	880 mm
Inner ring mounting-hole count (ni)	48
Inner ring mounting-hole specification (Mi)	M20
GEAR	
Gear module (m)	11 mm
Gear tooth count (z)	72
Addendum modification product x*m (xm)	7,02 mm
Gear pitch diameter (Dp)	806 mm
Gear Tooth Height (Hd)	85 mm
Gear Hardening Indicator (Temptra)	
PERFORMANCE	
Basic static axial load rating (C0a)	3 740 kN
Static tilting moment rating (M0r)	892 kNm

Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

PERFORMANCE (CONTINUED)	
Normal tooth force (Fnom)	121 kN
Maximum tooth force (Fmax)	242 kN
MISCELLANEOUS	
Pattern (Schema)	C
PERFORMANCE RATINGS	
Rating Axial Static	3 740 kN Not simultaneous with other listed dynamic ratings
Rating Tilting Moment Static	892 kNm Not simultaneous with other listed dynamic ratings
Rating Tooth Force Normal	121 kN Not simultaneous with other listed dynamic ratings
Rating Tooth Force Max	242 kN Not simultaneous with other listed dynamic ratings
MOUNTING INTERFACES	
Outer ring mounting	22 holes - 22; M20
Inner ring mounting	48 holes - 48; M20
GEAR INTERFACE	
Pitch system	module
Module reference	11 mm
Number of teeth	72
SOURCE TRACEABILITY	
Source document code	LA-LEONESSA-INTERNAL-GEAR-CATALOG-2017
Source file	SLEWING-BEARINGS-WITH-INTERNAL-GEAR.pdf
PDF page	8
Printed page	8


Complete Product Data

All values below are generated from the current public verified replacement record. Source values are retained and metric references are shown where available.

SOURCE TRACEABILITY (CONTINUED)	
Source language	EN
Original unit system	Metric
PUBLISHED TECHNICAL MEDIA	
Load Curve Chart	la-leonessa-1ri-static_load_curve.webp SHA-256: 88ec75fa8bed689f66b14f5b91e2b5afb0052df21fcd350ae92760f6f677df55
Outline Drawing	la-leonessa-1ri-drawing.webp SHA-256: 3c0269351f1480df2b4130d7fb5c79552a0896a4f557467d7b138da54c54c490

Published Load / Performance Chart

Use the published chart as a preliminary selection aid only. The model legend, curve family and source document must be reviewed together with the operating load case.

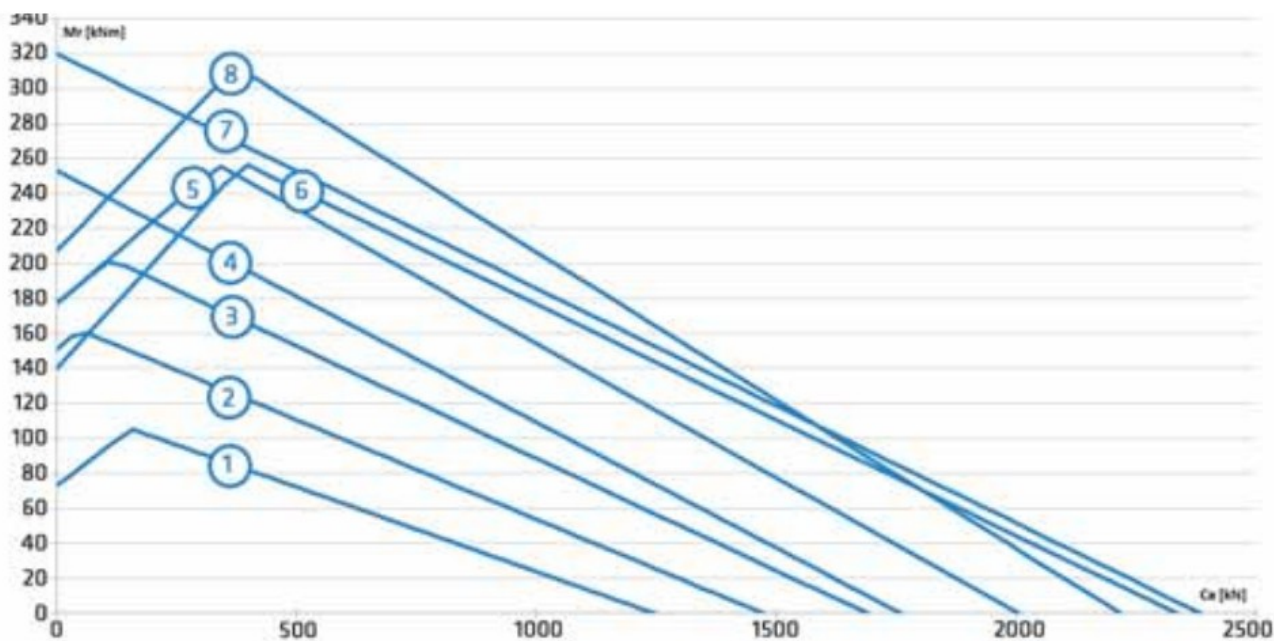

la-leonessa-1ri-static_load_curve.webp | SHA-256:
88ec75fa8bed689f66b14f5b91e2b5afb0052df21fcd350ae92760f6f677df55

Engineering note: final approval must also consider mounting rigidity, bolt capacity, duty cycle, lubrication, temperature, environment and installation conditions.

Source and Verification Traceability

PUBLIC RECORD UID FQZYWI522AMGIDWBAMEHENPKBK	SOURCE DOCUMENT LA-LEONESSA-INTERNAL-GEAR-CATALOG-2017
SOURCE FILE SLEWING-BEARINGS-WITH-INTERNAL-GEAR.pdf	SOURCE LOCATION PDF page 8 Printed page 8
VERIFICATION Level 3 - MERYDOM Engineering Verified	REVIEWED BY MERYDOM Engineering Department

Engineering Confirmation Boundary

- 1

Confirm the exact model designation and all installation-envelope dimensions.
- 2

Confirm mounting-hole quantity, bolt circle, hole specification, bolt grade and preload.
- 3

Confirm gear arrangement, pitch system, tooth count, backlash and mating-pinion data.
- 4

Confirm axial, radial and moment loads, load combinations, duty cycle and required life.
- 5

Confirm support flatness and stiffness, lubrication, sealing, temperature and environment.
- 6

Final drawing revision, manufacturing tolerances and documentation package are confirmed with the quotation.

Request Price, Delivery and Final Engineering Confirmation

Email: jovi@merydom.com | Email: andi@merydom.com | WhatsApp: +86 17705201170

Product page: <https://rotnex.com/tr/urunler/muadil-doner-tabla-rulmanlari/la-leonessa/v30i139/>

Trademark and legal notice: referenced brand and model names are used only for identification and cross-reference. MERYDOM is an independent manufacturer and is not affiliated with or endorsed by the referenced brand unless expressly stated.